

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**






## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04N 7/12, 5/14</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/52356</b> <b>(43) International Publication Date:</b> 19 November 1998 (19.11.98)
<b>(21) International Application Number:</b> PCT/US97/08266 <b>(22) International Filing Date:</b> 16 May 1997 (16.05.97) <b>(71) Applicant (for all designated States except US):</b> THE TRUSTEES OF COLUMBIA UNIVERSITY IN THE CITY OF NEW YORK [US/US]; 116th Street and Broadway, New York, NY 10027 (US). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> CHANG, Shih-Fu [CN/US]; Columbia University, Dept. of Electrical Engineering, 500 West 120th Street, New York, NY 10027 (US). MENG, Jianhao [CN/US]; Columbia University, Dept. of Electrical Engineering, 500 West 120th Street, New York, NY 10027 (US). <b>(74) Agents:</b> TANG, Henry et al.; Brumbaugh, Graves, Donohue & Raymond, 30 Rockefeller Plaza, New York, NY 10112 (US).		<b>(81) Designated States:</b> CA, JP, US.  <b>Published</b> <i>With international search report.</i>

**(54) Title:** METHODS AND ARCHITECTURE FOR INDEXING AND EDITING COMPRESSED VIDEO OVER THE WORLD WIDE WEB

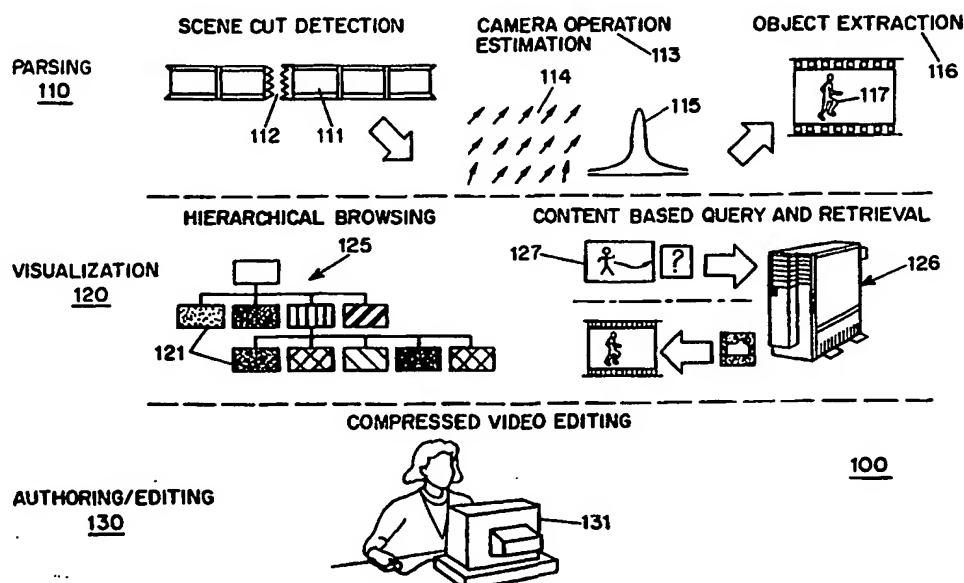**(57) Abstract**

Techniques for detecting moving video objects in a compressed digital bitstream (111) and for tools for editing compressed video are disclosed. Video objects (117) are detected and indexed by analyzing a compressed bitstream to locate scene cuts (112), estimating operating parameters for a camera which initially viewed the video (114), and detecting one or more moving video objects represented in the compressed bitstream by applying global motion compensation which account for the estimated operating parameters. Tools are provided for permitting dissolve, masking, freeze frame, slow and variable speed playback, and strobe motion special effects to compressed video. The tools may be implemented in a system for editing (130) compressed video information over a distributed network.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## Description

### Methods and Architecture for Indexing and Editing Compressed Video Over the World Wide Web

#### Notice of Government Rights

The U.S. Government has certain rights in this invention pursuant to the terms of the National Science Foundation CAREER award IRI-9501266.

#### Background of the Invention

##### I. Field of the invention.

The present invention relates to techniques for editing and parsing compressed digital information, and more specifically, to editing and parsing visual information in the compressed domain.

##### II. Description of the related art.

5 With the increasing use of local area, wide area and global networks to spread information, digital video has become an essential component of many new media applications. The inclusion of video in an application often gives the application not only increased functional utility, but also an aesthetic appeal that cannot be obtained by text or audio information alone. However, while digital  
10 video greatly increases our ability to share information, it demands special technical support in processing, communication, and storage.

In order to reduce bandwidth requirements to manageable levels, video information is generally transmitted between systems in the digital environment the form of compressed bitstreams that are in a standard format, e.g., Motion  
15 JPEG, MPEG-1, MPEG-2, H.261 or H.263. In these compressed formats, the Discrete Cosine Transform ("DCT") is utilized in order to transform NxN blocks of pixel data, where n typically is set to eight, into the DCT domain where quantization is more readily performed. Run-length encoding and entropy coding (i.e., Huffman coding or arithmetic coding) are applied to the quantized bitstream

to produce a compressed bitstream which has a significantly reduced bit rate than the original uncompressed source signal. The process is assisted by additional side information, in the form of motion vectors, which are used to construct frame or field-based predictions from neighboring frames or fields by taking into account the inter-frame or inter-field motion that is typically present.

In order to be usable by a receiving system, such coded bitstreams must be both parsed and decoded. For example, in the case of an MPEG-2 encoded bitstream, the bitstream must be parsed into slices and macroblocks before the information contained in the bitstream is usable by an MPEG-2 decoder. Parsed bitstream information may be used directly by an MPEG-2 decoder to reconstruct the original visual information, or may be subjected to further processing.

In the case of compressed digital video, further processing of video information can occur either in the normal, uncompressed domain or in the compressed domain. Indeed, there have been numerous attempts by others in the field to realize useful techniques for indexing and manipulating digital video information in both the uncompressed and compressed domains.

For example, in the article by S.W. Smoliar et al., "Content-Based Video Indexing and Retrieval," IEEE Multimedia, summer 1994, pp. 62-72, a color histogram comparison technique is proposed to detect scene cuts in the spatial (uncompressed) domain. In the article by B. Shahraray, "Scene Change Detection and Content-Based Sampling of Video Sequences," SPIE Conf. Digital Image Compression: Algorithms and Technologies 1995, Vol. 2419, a block-based match and motion estimation algorithm is presented.

For compressed video information, the article by F. Arman et al., "Image Processing on Compressed Data for Large Video Databases," Proceedings of ACM Multimedia '93, June 1993, pp. 267-272, proposes a technique for detecting scene cuts in JPEG compressed images by comparing the DCT coefficients of selected blocks from each frame. Likewise, the article by J. Meng et al., "Scene Change Detection in a MPEG Compressed Video Sequence," IS&T/SPIE Symposium Proceedings, Vol. 2419, Feb. 1995, San Jose, California, provides a methodology for the detection of direct scene cuts based on the distribution of motion vectors,

and a technique for the location of transitional scene cuts based on DCT DC coefficients. Algorithms disclosed in the article by M.M. Yeung, et al. "Video Browsing using Clustering and Scene Transitions on Compressed Sequences," IS&T/SPIE Symposium Proceedings, Feb. 1995, San Jose, California. Vol. 2417, pp. 399-413, enable the browsing of video shots after scene cuts are located. However, the Smoliar et al., Shahraray, and Arman et al. references are limited to scene change detection, and the Meng et al. and Yeung et al. references do not provide any functions for editing compressed video.

Others in the field have attempted to address problems associated with camera operation and moving objects in a video sequence. For example, in the spatial domain, H.S. Sawhney, et al., "Model-Based 2D & 3D Dominant Motion Estimation for Mosaicking and Video Representation," Proc. Fifth Int'l conf. Computer Vision, Los Alamitos, CA., 1995, pp. 583-390, proposes to find parameters of an affine matrix and to construct a mosaic image from a sequence of video images. In similar vain, the work by A. Nagasaka et al., "Automatic Video Indexing and Full-Video Search for Object Appearances," in E. Knuth and L. M. Wegner, editors, Video Database Systems, II, Elsevier Science Publishers B.V., North-Holland, 1992, pp. 113 - 127, proposes searching for object appearances and using them in a video indexing technique.

In the compressed domain, the detection of certain camera operations, e.g., zoom and pan, based on motion vectors have been proposed in both A. Akutsu et al., "Video Indexing Using Motion Vectors," SPIE Visual Communications and Image Processing 1992, Vol. 1818, pp. 1522-1530, and Y.T. Tse et al., "Global Zoom/Pan Estimation and Compensation For Video Compression" Proceedings of ICASSP 1991, pp.2725-2728. In these proposed techniques, simple three parameter models are employed which require two assumptions, i.e., that camera panning is slow and focal length is long. However, such restrictions make the algorithms not suitable for general video processing.

There have also been attempts to develop techniques aimed specifically at digital video indexing. For example, in the aforementioned Smoliar et al. article, the authors propose using finite state models in order to parse and retrieve specific

domain video, such as news video. Likewise, in A. Hampapur, et al., "Feature Based Digital Video Indexing," IFIP2.6 Visual Database Systems, III, Switzerland, March, 95, a feature based video indexing scheme using low level machine derivable indices to map into the set of application specific video indices is presented.

One attempt to enable users to manipulate image and video information was proposed by J. Swartz, et al., "A Resolution Independent Video Language," Proceedings of ACM Multimedia '95, pp. 179-188, as a resolution independent video language (Rivl). However, although Rivl uses group of pictures (GOPs) level direct copying whenever possible for "cut and paste" operations on MPEG video, it does not use operations in the compressed domain at frame and macroblock levels for special effects editing. Instead, most video effects in Rivl are done by decoding each frame into the pixel domain and then applying image library routines.

The techniques proposed by Swartz et al. and others which rely on performing some or all video data manipulation functions in the uncompressed domain do not provide a useful, truly comprehensive technique for indexing and manipulating digital video. As explained in S.-F. Chang, "Compressed-Domain Techniques for Image/Video Indexing and Manipulation," IEEE Intern. Conf. on Image Processing, ICIP 95, Special Session on Digital Image/Video Libraries and Video-on-demand, Oct. 1995, Washington DC, the disclosure of which is incorporated by reference herein, the compressed-domain approach offers several powerful benefits.

First, implementation of the same manipulation algorithms in the compressed domain is much cheaper than that in the uncompressed domain because the data rate is highly reduced in the compressed domain (e.g., a typical 20:1 to 50:1 compression ratio for MPEG). Second, given most existing images and videos stored in the compressed form, specific manipulation algorithms can be applied to the compressed streams without full decoding of the compressed images/videos. In addition, because that full decoding and re-encoding of video are not necessary, manipulating video in the compressed domain avoids the extra



quality degradation inherent in the reencoding process. Thus, as further explained in the article by the present inventors, J. Meng and S.-F. Chang, "Tools for Compressed-Domain Video Indexing and Editing," SPIE Conference on Storage and Retrieval for Image and Video Database, Vol. 2670, San Jose, California, Feb. 5 1996, the disclosure of which is incorporated by reference herein, for MPEG compressed video editing, speed performance can be improved by more than 60 times and the video quality can be improved by about 3-4 dB if a compressed-domain approach is used rather than a traditional decode-edit-reencode approach.

10 A truly comprehensive technique for indexing and manipulating digital video must meet two requirements. First, the technique must provide for key content browsing and searching, in order to permit users to efficiently browse through or search for key content of the video without full decoding and viewing the entire video stream. In this connection, "key content" refers to key frames in 15 video sequences, prominent video objects and their associated visual features (motion, shape, color, and trajectory), or special reconstructed video models for representing video content in a video scene. Second, the technique must allow for video editing directly in the compressed domain to allow users to manipulate an specific object of interest in the video stream without having to fully decode the 20 video. For example, the technique should permit a user to cut and paste any arbitrary segment from an existing video stream to produce a new video stream which conforms to the valid compression format.

Unfortunately, none of the prior art techniques available at present are able to meet these requirements. Thus, the prior art techniques fail to permit users who 25 want to manipulate compressed digital video information with the necessary tools to extract a rich set of visual features associated with visual scenes and individual objects directly from compressed video so as not only to enable content based query searches, but also to allow for integration with domain knowledge for derivation of higher-level semantics.

### Summary of the Invention

An object of the present invention is to provide comprehensive techniques for indexing and manipulating digital video in the compressed domain.

Another object of the present invention is to provide techniques for key  
5 content browsing and searching of compressed digital video without decoding and viewing the entire video stream.

A further object of the present invention is to provide techniques which allow for video editing directly in the compressed domain

A still further object of the present invention is to provide tools that permit  
10 users who want to manipulate compressed digital video information to extract a rich set of visual features associated with visual scenes and individual objects directly from compressed video.

Yet another object of this invention is to provide an architecture which permits users to manipulate compressed video information over a distributed  
15 network, such as the Internet.

In order to meet these and other objects which will become apparent with reference to further disclosure set forth below, the present invention provides a method for detecting moving video objects in a compressed digital bitstream which represents a sequence of fields or frames of video information for one or more  
20 previously captured scenes of video. The described method advantageously provides for analyzing a compressed bistream to locate scene cuts so that at least one sequence of fields or frames of video information which represents a single video scene is determined. The method also provides for estimating one or more operating parameters of a camera which initially captured the video scene, by  
25 analyzing a portion of the compressed bitstream which corresponds to the video scene, and for detecting one or more moving video objects represented in the compressed bitstream by applying global motion compensation with the estimated camera operating parameters.

In a preferred process, the compressed bitstream is a bitstream  
30 compressed in accordance with the MPEG-1, MPEG-2, H261, or H263 video standard. In this preferred embodiment, analyzing can beneficially be

accomplished by parsing the compressed bitstream into blocks of video information and associated motion vector information for each field or frame of video information which comprises the determined sequence of fields or frames of video information representative of said single scene, performing inverse motion compensation on each of the parsed blocks of video information to derive discrete cosign transform coefficients for each of the parsed blocks of video information, counting the motion vector information associated with each of the parsed blocks of video information, and determining from the counted motion vector information and discrete cosign transform coefficient information whether one of the scene cuts has occurred.

In an alternative embodiment, analyzing is performed by parsing the compressed bitstream into blocks of video information and associated motion vector information for each field or frame of video information which comprises the determined sequence of fields or frames of video information representative of the scene, and estimating is executed by approximating any zoom and any pan of the camera by determining a multi-parameter transform model applied to the parsed motion vector information. In an especially preferred process, the frame difference due to camera pan and zoom motion may be modeled by a six-parameter affine transform which represents the global motion information representative of the zoom and pan of the camera.

The detecting step advantageously provides for computing local object motion for one or more moving video objects based on the global motion information and on one or more motion vectors which correspond to the one or more moving video objects. In addition, thresholding and morphological operations are preferably applied to the determined local object motion values to eliminate any erroneously sensed moving objects. Further, border points of the detected moving objects are determined to generate a bounding box for the detected moving object.

The present invention also provides for an apparatus for detecting moving video objects in a compressed digital bitstream which represents a sequence of fields or frames of video information for one or more previously captured scenes

of video. Usefully, the apparatus includes means for analyzing the compressed  
bistream to locate scene cuts therein and to determine at least one sequence of  
fields or frames of video information which represents a single video scene, means  
for estimating one or more operating parameters for a camera which initially  
5 viewed the video scene by analyzing a portion of the compressed bitstream which  
corresponds to the video scene, and means for detecting one or more moving video  
objects represented in the compressed bitstream by applying global motion  
compensation to the estimated operating parameters.

A different aspect of the present invention provides techniques for  
10 dissolving an incoming scene of video information which comprises a sequence of  
fields or frame of compressed video information to an outgoing scene of video  
information which comprises a sequence of fields or frame of compressed video  
information. This technique advantageously provides for applying DCT domain  
motion compensation to obtain DCT coefficients for all blocks of video  
15 information which make up a last frame of the outgoing video scene and the first  
frame of the incoming video scene, and for creating a frame in the dissolve region  
frame from the DCT coefficients of the last outgoing frame and the first incoming  
frame.

In an especially preferred arrangement, an initial value for a weighting  
20 function is selected prior to the creation of a first frame in the dissolve region and  
is used in the creation of the first frame in the dissolve region. The weighting  
value is then incremented, and a second dissolve frame from the DCT coefficients  
is generated.

In yet another aspect of the present invention, a technique for masking a  
25 compressed frame of digital video information is provided. The technique first  
determines whether the frame to be masked is intra-coded, predictive-coded or bi-  
directionally predictive-coded. If the frame is intra-coded, the technique provides  
for extracting DCT coefficients for all blocks within the frame, examining a block,  
to determine where in the frame the block is located, setting DCT coefficients for  
30 the block to zero if the block is outside the mask region, and applying a DCT

cropping algorithm to the DCT coefficients if the block is on the boundary of the mask region.

If the frame is predictive-coded or bi-directionally predictive-coded, the technique provides for examining motion vectors associated with block<sub>n</sub> to  
5 determine whether they point to blocks outside or on the mask region, and reencoding the block if a motion vector points to blocks outside the boundary, or on, the mask region.

In still another aspect of the present invention, a technique for generating a frozen frame of video information from a sequence of frames of compressed video  
10 information is provided. The technique attractively provides for selecting a frame of compressed video information to be frozen, determining whether the frame to be frozen is intra-coded, predictive-coded or bi-directionally predictive-coded, and if the frame is not intra-coded, converting it to become intra-coded, creating duplicate  
15 predictive-coded frames, and arranging the intra-coded frame and the duplicate predictive-coded frames into a sequence of compressed frames of video information.

In yet a further aspect of the present invention, a system for editing compressed video information over a distributed network is provided. The system includes a client computer, a network link for permitting said client computer to  
20 search for and locate compressed video information on said distributed network, and tools for editing a compressed bitstream of video information over the distributed network.

The accompanying drawings, which are incorporated and constitute part of this disclosure, illustrate a preferred embodiment of the invention and serve to  
25 explain the principles of the invention.

#### Brief Description of the Drawings

Fig. 1 illustrates a system in accordance with one aspect of the present invention;

Fig. 2. is a flowchart which illustrates how a scene cut is detected in  
30 accordance with one aspect of the present invention;

Fig. 3. is a flowchart which illustrates how camera parameters are estimated in accordance with one aspect of the present invention;

Fig. 4 is a vector diagram which serves to explain global and local motion;

Fig. 5 depicts an exemplary frame of compressed video information and motion vectors for the frame;

Fig. 6 is a flowchart which illustrates global motion compensation in accordance with one aspect of the present invention;

Fig. 7 depicts prior art editing of compressed video bistreams;

Fig. 8a depicts the dissolve effect; Fig 8(b) is a flowchart which illustrates the dissolve effect;

Fig. 9a depicts masking; Fig 9(b) is a flowchart which illustrates masking;

Fig. 10 is a flowchart which illustrates the freeze-frame effect;

Fig. 11 depicts two alternative techniques for the slow motion effect;

Fig. 12 is a system diagram of a distributed network in accordance with one aspect of the present invention; and

Fig. 13 depicts exemplarily techniques which may be executed in the distributed network illustrated in Fig. 12.

#### Description of the Preferred Embodiments

Referring to Fig. 1, an exemplary embodiment of our invention which permits a user to edit and parse visual information in the compressed domain is provided. The architecture of the system 100 is broadly arranged into three functional modules, a parsing module 110, a visualization module 120, and an authoring and editing module 130.

In the parsing module, an incoming bitstream of compressed video information 111 which may be, for example, an MPEG-2 compressed bitstream is examined for scene cuts 112 and broken into shot segments, where each segment includes one or more fields or frames of compressed video information. In an MPEG-2 bitstream, the shot segments will be made of three types of fields or frames, i.e., Intra-coded ("I") fields which are coded independently and entirely without reference to other fields, Predictive-coded ("P") fields which are coded

with reference to temporally preceding I or P fields in the sequence, and Bi-directionally predictive-coded (“B”) fields which are coded with reference to the nearest preceding and/or future I or P fields in the sequence. The bistream will also include associated motion vector information for the P and B fields which  
5 “point” to blocks of video information in a preceding or succeeding field or frame which are needed to reconstruct the compressed field or frame of video information.

The parsing module compiles a list of scene cuts which are useful for indexing the compressed video information. The individual shot segments are next  
10 analyzed 113 in order to derive camera operation parameters. In Figure 1, the vector field 114 is representative of the pan of the camera which originally captured the video information which is being analyzed. Histogram 115 is used to detect the pan of the camera. Based on the derived operating parameters, moving objects 117 within the compressed video information 116 are detected and shape  
15 and trajectory features for such moving objects are extracted.

In the visualization module 120, the complied list of scene cuts and the derived camera zoom and pan information are used to extract key frames 121 which represent each video shot. The key frames 121 are placed in a hierarchical arrangement 125 so that they may be readily browsed with a hierarchical video  
20 scene browser, such as the browser described in D. Zhong et al., “Clustering Methods for Video Browsing and Annotation,” Storage and Retrieval for Still Image and Video Databases IV, IS&T/SPIE’s Electronic Images: Science & Tech. 96, Vol 2670 (1996). A content-based image query system 126 may then be used to index and retrieve key frames or video objects based on their visual features and  
25 spatial layout.

In the authoring and editing module 130, software tools are provided to not only enable a user to cut and past arbitrary compressed video segments to form new video segments, but also to add special effects to such video segments, such as dissolve, key, masking and motion effects.

30 The parsing module 110 is explained in further detail with reference to the figures 2 and 3. Although the preferred steps executed e.g. on a computer 131 to

locate scene cuts in a compressed bitstream are fully disclosed in the above referenced article by Meng et al., the disclosure of which is incorporated by reference herein, that technique is now described with reference to figure 2.

5 An MPEG-1 or MPEG-2 compressed bitstream 201 that is received by the parsing module 110 is first subjected to parsing 210. Such a bitstream represents an arrangement of NxN blocks of video information that are broadly organized into macroblocks, where each macroblock is defined by four blocks of luminance information and one block of chrominance information, and further organized into slices which represent contiguous sequences of macroblocks of video information in  
10 raster scan order. The NxN blocks of video information are preferably 8x8 blocks. The bitstream also represents associated motion vector information and prediction error difference information which are needed to reconstruct original blocks of video information.

In the parsing stage 210, the bitstream, is parsed down to the fundamental  
15 block level by parsing techniques known to those skilled in the art 211. The parsed blocks of video information are still in compressed format and are thus represented by Direct Cosign Transform ("DCT") coefficients which have been quantized, Zig-Zag run-length encoded and variable length coded, as those skilled in the art will appreciate.

20 In the inverse motion compensation stage 220, the parsed blocks of video information which belong to P and B frames are then subjected to inverse motion compensation 220 by using the associated motion vector information to locate reference blocks of video information and reconstruct the DCT coefficients of blocks of video information in the B and P frames. In this step 220, only the first  
25 (the "DC") DCT coefficients are used. Motion vectors associated with the B and P frames are counted 222 for each frame in the sequence.

In the Statistical Stage 230, three ratios, i.e., the number of intra-coded macroblocks to the number of forward motion vectors, the number of backward motion vectors to the number of forward motion vectors, and the number of  
30 forward motion vectors to the number of backward motion vectors, are calculated 231 in order to detecting direct scene cuts in P, B, and I frames, respectively. In



this stage, the fact that most video shots of compressed MPEG video are formed by consecutive P, I and B frames that have a high degree of temporal correlation is taken advantage of. For P and B frames, this correlation is characterized by the ratio of the number of backward motion vectors, or intracoded macroblocks, to the number of forward motion vectors. For example, when a direct scene cut occurs on a P-frame, most macroblocks will be intracoded (i.e., no interframe prediction).

Also in the statistical stage 230 the variance of the DCT DC coefficients of Luminance in the I, P and B frames is determined 232. As those skilled in the art will appreciate.

Next, in the detection stage 240, the ratios calculated in 231 are compared to local adaptive thresholds in order to detect the peak values 241. For P frames, the ratio of the number of intra-coded macroblocks to the number of forward motion vectors is examined. For B frames, the ratio of the number of backward motion vectors to the number of forward motion vectors is examined.

Also in the detection stage 240, the variance of DCT DC coefficients calculated for I and P frames in 232 is used in two ways. For I frames, this variance information is used together with the ratio of the number of forward motion vectors to the number of backward motion vectors determined in 231 in order to detect candidate scene changes 242. If the ratio is above a predetermined threshold, the frame is marked as containing a suspected scene cut. If the variable information is much different than was the variance information for the immediately preceding I frame, a suspected scene cut is likewise detectable. The variance information is also used directly to detect dissolve regions, i.e. regions where one scene is fading out and a second is fading in 243 by examining the parabolic curve of the variance information.

In the decision stage 250, duplicate detections of scene cuts are eliminated 251 before list of scenes 252 is determined. In addition, if a suspected scene change occurs within a time threshold T rejection of a previously detected scene change, no scene change is recorded.

With scene cuts detected, the bitstream is broken into scenes or "shots" which represent different sets of visual information that may be of interest to a

user. The next block of our parsing module 110, camera operating estimation 113, examines the individual shots for recognizable information which is highly useful in indexing the different shots which have been parsed.

5 In particular, certain low level visual features such as camera zoom and pan, and the presence of moving visual objects are useful information for video indexing. Camera zoom and pan, which give the global motion of the shot being analyzed, can be estimated with a 6-parameter affine transform model by using the actual motion vectors from the MPEG compressed stream.

The motion vectors in MPEG are usually generated by block matching:  
10 finding a block in the reference frame so that the mean square error of prediction is minimized. Although the motion vectors do not represent the true optical flow, it is still good in most cases to estimate the camera parameters in sequences that do not contain large dark or uniform regions.

When the distance between the object or background and the camera is  
15 large, a 6 parameter affine transform can be used to describe the global motion of the current frame:

$$\begin{bmatrix} u \\ v \end{bmatrix} = \begin{bmatrix} 1 & x & y & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & x & y \end{bmatrix} \cdot [a_1 \ a_2 \ a_3 \ a_4 \ a_5 \ a_6]^T \quad (1)$$

where (x, y) is the coordinate of a macroblock in the current frame,  $[u \ v]^T$  is the motion vector associated with that macroblock, and  $[a_1 \ a_2 \ a_3 \ a_4 \ a_5 \ a_6]^T$  is the affine transform vector. In order to simplify the mathematics, the following variables can  
20 be defined:

U for  $[u, v]^T$

X for  $\begin{bmatrix} 1 & x & y & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & x & y \end{bmatrix}$ ,

and  $\hat{a}$  for  $[a_1 \ a_2 \ a_3 \ a_4 \ a_5 \ a_6]^T$ .

25 Given the motion vector for each macroblock, a global parameter can be determined using Least Squares ("LS") estimation by finding a set of parameters to  $\hat{a}$  minimize the error between the motion vectors estimated in (1) and the actual motion vectors obtained from the MPEG stream:

$$S(\hat{a}) = \sum_x \sum_y [(\hat{u}_{xy} - u_{xy})^2 + (\hat{v}_{xy} - v_{xy})^2] \quad (2)$$

In equation (2),  $[\hat{u}, \hat{v}]^T$  is the estimated motion vector.  $\hat{a}$  is then solved for by setting the first derivative of  $S(\hat{a})$  to 0 to get:

$$\begin{bmatrix} N & A & B \\ A & C & E \\ B & E & D \end{bmatrix} \cdot \begin{bmatrix} a_1 \\ a_2 \\ a_3 \end{bmatrix} = \begin{bmatrix} U_1 \\ U_2 \\ U_3 \end{bmatrix} \text{ and } \begin{bmatrix} N & A & B \\ A & C & E \\ B & E & D \end{bmatrix} \cdot \begin{bmatrix} a_4 \\ a_5 \\ a_6 \end{bmatrix} = \begin{bmatrix} V_1 \\ V_2 \\ V_3 \end{bmatrix} \quad (3)$$

where,

$$\begin{aligned} N &= \sum_x \sum_y 1, A = \sum_x \sum_y x, B = \sum_x \sum_y y, \\ C &= \sum_x \sum_y x^2, D = \sum_x \sum_y y^2, E = \sum_x \sum_y x \cdot y, \\ U_1 &= \sum_x \sum_y u_{xy}, U_2 = \sum_x \sum_y u_{xy} \cdot x, U_3 = \sum_x \sum_y u_{xy} \cdot y, \\ V_1 &= \sum_x \sum_y v_{xy}, V_2 = \sum_x \sum_y v_{xy} \cdot x, V_3 = \sum_x \sum_y v_{xy} \cdot y. \end{aligned}$$

All summations are computed over all valid macroblocks whose motion  
 5 vectors survive after the nonlinear noise reduction process. (For example, median  
 filter.) This process is used to eliminate obvious noise in the motion vector field.  
 After the first LS estimation, motion vectors that have large distance from the  
 estimated ones are filtered out before a second LS estimation. The estimation  
 process is preferably iterated several times to refine the accuracy.

10 Referring to figure 3, the foregoing process to determine a global motion  
 parameter is illustrated in flow diagram 300. In step 310, each motion vector  
 associated with the B and P frames contained in the shot are decoded. The  
 intermediate variables N, A, B, C, D, and E are interactively calculated using the x  
 and y coordinates for each macroblock in the current frame of video being  
 15 analyzed 320. Next, intermediate transform parameters  $u_1, u_2, u_3, v_1, v_2, v_3$  are  
 calculated using the decoded motion vectors and the x and y coordinates for such

macroblocks 330. Finally, the vector  $\hat{a}$  is solved for by solving for the matrix inverse operation 340.

After the global camera parameters  $\hat{a}$  are found, object motion can be extracted by applying global motion compensation. Referring to figure 4, if an  
5 object located at  $(x, y)$  in the current frame moves from  $(x_0, y_0)$  to  $(x_1, y_1)$  in the reference frame with motion vector  $U$ , then  $U+M = X \cdot \hat{a}$ . Thus, the motion of the local object can be recovered from its associated motion vectors as follows:

$$M = X \cdot \hat{a} - U \quad (4)$$

This is referred to as the global motion compensation ("GMC"). With  
10 reference to figure 5, a moving ballerina is shown against a largely stagnant background. In figure 5(a), the original motion vectors for an exemplary frame of compressed video is illustrated. In figure 5(b), the vector map for the exemplary frame is shown after GMC has been applied. As illustrated in figure 5(b), for  
15 motion vectors of the background, GMC gives mostly zero values, while for motion vectors of the foreground moving objects, GMC reveals the local motion of objects.

The moving objects themselves can be detected by comparing the magnitude of the local motion to a predetermined threshold value and by performing simple morphological operations to delete small false objects and to fill  
20 noisy spots. For example, in figure 5(c) there is shown an extracted moving object.

The DCT coefficients of the moving object are extracted from the compressed video information to provide for later querying of the object. Extraction of the DCT coefficient is done by the DCT domain motion compensation algorithm, as disclosed in U.S. Patent No. 5,408,274 to Chang et al.,  
25 the disclosure of which is incorporated by reference herein. The outermost points of the extracted object are used to form a bounding box, as illustrated in figure 5(d).

Again referring to figure 1, in the visualization module 120, the location and size of each extracted bounding box is saved in a database 126 for later

browsing and indexing by a user. Likewise, visual features of extracted objects, such as color, textures, and shape, are used to provide content-based visual querying 127 of these and associated video scenes.

The extraction of moving video objects from a compressed bitstream will now be described with reference to the flow diagram 600 of figure 6. First, GMC  
5 is applied to the present frame of video 610. Second, each globally motion compensated motion vector is compared to a predetermined threshold value 620 in order to eliminate non-moving parts of the frame from further consideration. Next, for blocks of information which still have non-zero motion vectors, the number of  
10 contiguous blocks are counted 630. For each contiguous area, the number of associated blocks are compared to a predetermined minimum threshold value 640 in order to eliminate false small objects from being detected. Finally, the border points for the remaining objects are identified and saved in a database, e.g. database 126, for later use 650, together with corresponding DCT coefficients for  
15 all blocks within the border. In this way, the important moving video object can be extracted and indexed for later viewing by a user.

With reference to figure 7, useful techniques for directly editing compressed digital video will now be described. In general, editing of compressed video is directed to permitting a user to cut a first segment of video 710 from a first  
20 video sequence 720 and a second segment of video 730 from a second sequence of video 740 to form a new bitstream of video information 750. Such techniques have been described in the art, including in the article by the present inventors, J. Meng et al., "Tools for Compressed-Domain Vide Indexing and Editing," SPIE Conf. on Storage and Retrieval for Image and Video Database, Vol. 2670 (1996),  
25 the disclosure of which is incorporated by reference herein.

In addition to the basic editing function "cut and paste", several more advanced visual effects can be created in the compressed domain. For I frames, the basic compression component is the Discrete Cosine Transform (DCT), which can be written in the following form:

30 
$$F(u,v) = \text{DCT}(f(x,y)) \quad (5)$$

Given the DCT, linear operations such as intensity addition and scaling can be performed in accordance with equations (6) and (7):

$$\text{DCT}(f_1(x,y) + f_2(x,y)) = F_1(u,v) + F_2(u,v) \quad (6)$$

$$\text{DCT}(\alpha \cdot f(x,y)) = \alpha \cdot F(u,v) \quad (7)$$

5 Algorithms for other operations such as spatial scaling, translation, and filtering in DCT domain are well known in the art. Generally, the DCT of the output video Y can be obtained by linear matrix operations of the input DCT,  $P_i$ , as follows:

$$10 \quad Y = \sum_i W_i \cdot P_i \cdot H_i \quad (8)$$

where  $H_i$  and  $W_i$  are special filter coefficient matrices in the DCT domain. For motion compensated B and P frames, the compressed-domain manipulation functions can be implemented in two ways. First, transform-domain techniques can be used to convert B and P frames to intraframe DCT coefficients, on which the above techniques can be readily applied. An alternative approach is to keep the B or P structure (i.e., the DCT coefficients of residual errors and motion vectors) and develop algorithms directly utilizing these data. Several advanced visual effects which can be created in the compressed domain - dissolve, masking, freeze frame, variable speed, and strobe motion - are now particularly described.

20 One of the most important tools used in film editing is dissolve. As illustrated in figure 8(a), dissolve refers to the technique where an outgoing video scene 801 is faded out while an incoming video scene 802 is faded in. In order to perform a dissolve on two different scenes of video, the actual DCT coefficients for each block of compressed video in the last frame of the outgoing video scene, and the DCT coefficients for each block of compressed video in the first frame of the incoming video scene, must be extracted. One technique for extracting such DCT coefficients is described in the above-mentioned Chang et al. patent. The Chang et al. patent describes a technique which uses DCT domain inverse motion

compensation to obtain the DCT coefficients for all blocks of video information which make up the needed frames of video.

When there is no or little motion in the two videos scenes, the dissolve effects can be approximated by the linear combination of the two video scenes  $F_1$  and  $F_2$ :

$$F(u,v,t) = \alpha(t) \cdot F_1(u,v,t_1) + (1-\alpha(t)) \cdot F_2(u,v,t_2) \quad (9)$$

$u$  and  $v$  are coordinates within a frame,  $t$  is the frame index value which may range from 1 to  $N$ ,  $n$  being the total number of frames in the dissolved region, and  $\alpha(t)$  is a weighing function that is variable from 100% to 0%,  $F_1$  is the composite of the derived DCT coefficients for all blocks which make up the last frame of the outgoing video scene and  $F_2$  is the composite of the derived DCT coefficients for all blocks which make up the first frame of the incoming video scene. The resulting effect is a dissolve transition from a particular frozen frame of the outgoing video scene to another frozen frame of the incoming video scene.

Thus, to smooth out the dissolve where one or both of the dissolving scenes contain moving video objects, it is desirable to re-encode several dissolving frames over a transitional period  $t_1 - t_2$ . The reader is referred to the Appendix of this patent document for our preferred source code for implementing a dissolve.

Referring to figure 8(b), a method for dissolving an incoming scene and an outgoing scene of video is now described by way of a flowchart 800. In step 810, DCT domain motion compensation is used to obtain the DCT coefficients for all blocks of video information which make up the last frame of an outgoing video scene  $F_1$ . In step 820, DCT domain motion compensation is used to obtain the DCT coefficients for all blocks of video information which make up the first frame of an incoming video scene  $F_2$ . In step 830, the initial value for the weighing function,  $\alpha(t)$ , is chosen. In step 840, equation 9 is applied to create a first frame in the dissolve region. The value of  $t$  is then incremented until a final value  $n$  is obtained 850. The process 830-850 is repeated to create all dissolve frames for the duration  $t = 1$  to  $n$ .

A second important tool used in film editing is masking. As illustrated in figure 9(a), the film effect of masking video refers to transforming an original video scene having e.g. a 4:3 aspect ratio to different aspect ratios such as 1:1.66, 1:1.85, 1:2.35, or 16:9. Masking can also be used to crop part of the frame region to a different frame size. For I frames, the DCT coefficients for blocks outside of the desired region are set to 0, and the coefficients for blocks that lie on the masking boundaries can be recalculated using a simplified DCT cropping algorithm:

$$\text{DCT}(B) = \text{DCT}(H) \cdot \text{DCT}(A), \quad \text{where } H = \begin{bmatrix} 0 & 0 \\ 0 & I_h \end{bmatrix} \quad (10)$$

where A is an original block located on the boundary, B is the new masked block, and  $I_h$  is the identity matrix with size  $h \times h$ , as shown in figure 9a.

For P and B frames, only macroblocks with motion vectors pointing outside of the masking region need to be re-encoded. Macroblocks with motion vectors pointing inside do not need any modification. Efficient algorithms for reencoding macroblocks are well known in the art and are described in, for example, the above-referenced Chang et al. patent.

Referring to figure 9(b), a method for performing masking is now described. In step 910, the frame to be masked is examined in order to determine whether it is an I, P or B frame. If the frame is an I frame 911, all DCT coefficients for all blocks within the frame are extracted 920. Block<sub>n</sub> is examined 930 to determine where in the frame it is located. If the block is inside the mask region 931, the DCT coefficients for the block are unchanged 941. If the block is outside the mask region 932, the DCT coefficients for the block are set to zero 942. If the block is on the boundary of the masked region 933, the DCT cropping algorithm, i.e., equation 10, is applied 943. The block index n is incremented 950 and the process repeated 930-950 until all blocks have been examined.

If, however, the frame to be masked is either a P or B frame 920, motion vectors associated with block<sub>n</sub> are examined 960 to determine whether they point to blocks outside or on the mask region 970. If a motion vector points to blocks



outside or on the mask region 972, the macroblock is reencoded 980. The block index n is incremented 990 and the process repeated 960-990 until all blocks have been examined.

5 A third important tool used in film editing is the freeze effect. Since the freeze effect is usually longer than 1 second, simply repeating duplicate frames is not desirable if interactive playback (e.g. random search) is desired. Instead, the film effect of freeze frame requires the use of periodic I frames.

Thus, in order to ensure interactive playback capabilities, if the frozen frame is a P or B frame, it should be converted to an I frame. In order to convert a  
10 P or B frame into an I frame, every block of video information for the frame that has an associated motion vector is converted into a pure array of DCT coefficients, without motion vector information. The above-mentioned DCT domain motion compensation algorithm described in the Chang et al. patent is advantageously used to effect such conversion. The converted blocks can be referred to as  
15 intracoded blocks. Thereafter, the group of pictures which represent the frozen frame are filled with duplicated P frames, with all macroblocks in the duplicated P frames being to Motion Compensation Not Coded (i.e., 0 motion vector, and 0 residue error). Duplicate P frames can easily be created independently and inserted after I or P frames, as those familiar with digital compression techniques will easily  
20 understand.

A method for generating a frozen frame of video information is now described with reference to flowchart 1000 in figure 10. In step 1010, a user-defined frame of compressed video information is selected for the freeze-frame effect. In step 1020, the frame is examined in order to determine whether it  
25 is an I, P or B frame. If the frame is not an I frame 1021, it is converted into an I frame 1030. Finally, original 1022 or converted 1030 I frames are then used as to create duplicate P frames 1040. Periodical I frames can be inserted to increase interactivity, and to maintain a compatible bitrate.

A fourth important tool used in film editing is variable speed playback.  
30 Faster than normal playback, e.g., fast forward, is simply realized by dropping B, P, and then I frames according to the variable speed desired.

With respect to slow motion, depending on the slow motion rate, there are two possible approaches. With reference to figure 11, one approach is to simply insert duplicate B frames (B') whenever an original B frame appears. Duplicate B frames are frames which copy all DCT coefficient, and associated motion vectors from previous B frame. There is no decoding or re-encoding involved in this approach. However, this approach has a drawback since the I/P frame delay is increased by a factor equal to the inverse of the motion rate. For example, in the illustrative sequence of frames shown in figure 11, the reference frame I<sub>0</sub> must be transmitted 4 frames earlier. This limitation makes this approach suitable for slow playback up to about ½ normal frame rate. This will require an increased decoder buffer size.

In approach 2, original P/B frames are converted to I frames using the DCT domain techniques described above, and duplicated P frames are inserted between I frames, as in the case with freeze frame. This approach reduces frame delay, although requiring extra DCT domain manipulations.

Another interesting tool used in film editing is the special effect of strobe motion, which is simply a combination of freeze frame and variable speed playback. Strobe motion is effected by dropping original B and/or P frames and inserting duplicated P frames.

Referring to figure 12, a system for enabling distributed clients to browse and manipulate digital video by way of a distant server or host computer is now described. A master server 1210 or a group of distributed servers is linked to distant servers 1220, 1230, 1240 and several clients 1250, 1260. From their client workstations, users are empowered to browse and edit compressed vide images in the manner described above.

Moving to figure 13, the master server 1210 acts as the content aggregator 1310 to collect video content, and as a content analyzer 1320 to analyze the visual content for efficient indexing 1330. Thus, the server 1210 may accept the functions performed by the parsing module 110 described above. The server 1210 also provides an editing engine 1340 with basic editing tools, such as the tools described above, for rendering basic editing functions and various special effects.

Distributed clients 1250, 1260 access the video archives of the server through heterogeneous networks with interoperable interfaces, such as JAVA or MPEG MSDDL manipulation tools.

The video server 1210 can be linked with other distributed servers 1220, 5 1230, 1240 that have video search engines which search for image and video over a network, e.g., the World Wide Web. Once a video file is found on any other hosts or online content providers, it will be downloaded and preprocessed by the video server 1210 to extract "keyframes," i.e., frames 121 stored in the above described visualization module 120, and associated visual features such as camera motion, 10 moving objects, color, texture, and temporal features. The Universal Resource Location ("URL") of the video and the extracted features will be stored on the video server 1210. This client-server model empowers clients 1250, 1260 with much richer resources beyond that provided by the client's local system.

The client 1260 may open any video shot stored at the server 1210 and 15 browse 1330 the keyframes hierarchically using any one of numerous different viewing models, including sequential view, feature-based view, and story-based view. A sequential view arranges the video shots according to the sequential time order; a feature-based view clusters video shots with similar visual features to the same group; a story view presents video shots according to the story structures in 20 the semantic level. For example, for news applications, the story model may use the anchorperson shot as the criterion for automatic segmentation of video into semantic-level stories. The client can also perform shot-level editing or frame level editing 1390 using the above discussed editing tools. The clients may also submit their own videos which may be analyzed and indexed by the server 1210.

25 To view or to further refine retrieved video shots, the client 1260 may choose different levels of resolution for the video shots sent by the server 1210. There are three broad levels of video rendering. At the first level, the client 1260 can render only straight cuts at low resolution without any special effects. At the second level, the client may send information to the server defining low-resolution 30 video with desired special effects to be generated. Finally, when the client 1260 no longer wishes to perform editing, the master server 1210 will generate a

full-resolution video with all the effects requested by the client from the highest quality source video which is located at either the master server 1210 or the distributed remote content servers 1220, 1230, 1240. In this way, the user is given the flexibility to tradeoff between quality and speed.

5           In order to obtain a reduced resolution video sequence, for each video sequence stored on a server, a low resolution icon stream video must be extracted from the full resolution video. The icon stream is an 8:1 down sampled version of the original video. For I frames, DCT DC coefficients are obtained directly. For B and P frames, DCT domain inverse motion compensation is applied to the DCT  
10       coefficients. Finally, the extracted coefficients are converted into a smaller sized, e.g., 8:2:1, I frame as those skilled in the art will appreciate.

          The foregoing merely illustrates the principles of the invention. Various modifications and alterations to the described embodiments will be apparent to those skilled in the art in view of the inventors teachings herein. For example,  
15       while the above description was directed to indexing and editing digital vide which has been compressed in accordance with the MPEG format, the foregoing is equally applicable to other compressed bitstreams, e.g., Motion JPEG, H.261 or H.263, or any other algorithm based on transform coding and motion  
20       compensation. It will thus be appreciated that those skilled in the art will be able to devise numerous systems and methods which, although not explicitly shown or described herein, embody the principles of the invention and are thus within the spirit and scope of the invention.

Appendix

```
int do_dissolve(int duration)
{
    int i, j, k, s, cc;
5    int blks;
    double alpha;
    short (*tmp[3])[64];
    ld = &S1;
    initbits();
10    ld->end = roundtoP(ld->end);
    do_cut(ld->begin, ld->end);
    getDCTframe(ld->end, GETDCT);
    /* copy the first DCT to tmpDCT */
    for (cc=0; cc<3; cc++) {
15        if (cc==0)
            blks = (coded_picture_width*coded_picture_height)>>6;
        else
            blks = (chrom_width*chrom_height)>>6;
        memcpy(tmpDCT[cc], refDCT[cc], blks * sizeof(short [64]));
20    }
    ld = &S2;
    initbits();
    ld->begin = roundtoP(ld->begin);
    getDCTframe(ld->begin, GETDCT);
25    /* first prediction is based on tmpDCT */
    for (cc=0; cc<3; cc++) {
        if (cc==0)
            blks = (coded_picture_width*coded_picture_height)>>6;
        else
30        blks = (chrom_width*chrom_height)>>6;
        memcpy(auxDCT[cc], tmpDCT[cc], blks * sizeof(short [64]));
```

```
    }  
    for(s=1;s<=duration;s++) {  
        alpha=s/(double)duration;  
        for (i=0; i<3; i++) {  
5           tmp[i] = oldrefDCT[i];  
            oldrefDCT[i] = auxDCT[i];  
            auxDCT[i] = tmp[i];  
            newDCT[i]= auxDCT[i];  
        }  
10        for (cc=0; cc<3; cc++) {  
            if (cc==0)  
                blks = (coded_picture_width*coded_picture_height)>>6;  
            else  
                blks = (chrom_width*chrom_height)>>6;  
15        for (j=0; j<blks; j++) {  
            for (k=0; k<64; k++)  
                newDCT[cc][j][k] = (short) CLAMP((-2048,(1-alpha)*tmpDCT[cc][j][k]  
                                                    +alpha*refDCT[cc][j][k],2047);  
        }  
20    }  
    /* use refoldDCT as reference frame for DPCM of P */  
    putpictDCT(0);  
}  
}
```

Claims

- 1     1.     A method for detecting moving video objects in a compressed digital  
2           bitstream which represents a sequence of fields or frames of video  
3           information for one or more previously captured scenes of video,  
4           comprising the steps of:
  - 5           a.     analyzing said compressed bitstream to locate scene cuts therein,  
6                 thereby determining at least one sequence of fields or frames of  
7                 video information which represents a single video scene;
  - 8           b.     estimating one or more operating parameters for a camera which  
9                 initially captured said video scene by analyzing a portion of said  
10                compressed bitstream which corresponds to said video scene; and
  - 11           c.     detecting one or more moving video objects represented in said  
12                compressed bitstream by applying global motion compensation with  
13                said estimated operating parameters .
- 1     2.     The method of claim 1, further comprising the step of extracting visual  
2           features of said one or more detected moving video objects from said  
3           compressed bitstream.
- 1     3.     The method of claim 1, wherein said compressed bitstream comprises a  
2           bitstream compressed in accordance with the MPEG video standard.
- 1     4.     The method of claim 1, wherein said analyzing step further comprises the  
2           steps of:
  - 3           a.     parsing said compressed bitstream into blocks of video information  
4                 and associated motion vector information for each field or frame of  
5                 video information which comprises the determined sequence of  
6                 fields or frames of video information representative of said single  
7                 scene;

- 8           b.       performing inverse motion compensation on each of said parsed  
9               blocks of video information to derive discrete cosign transform  
10              coefficients for each of said parsed blocks of video information;  
11           c.       counting said motion vector information associated with each of  
12               said parsed blocks of video information; and  
13           d.       Determining from said counted motion vector information and said  
14               discrete cosign transform coefficient information whether one of  
15               said scene cuts has occurred.
- 1    5.       The method of claim 1, wherein said analyzing step comprises parsing said  
2           compressed bitstream into blocks of video information and associated  
3           motion vector information for each field or frame of video information  
4           which comprises the determined sequence of fields or frames of video  
5           information representative of said single scene, and wherein said estimating  
6           step comprises the step of estimating any zoom and any pan of said camera  
7           by determining a multi-parameter transform model applied to said parsed  
8           motion vector information.
- 1    6.       The method of claim 5, wherein said estimating step comprises the steps of:  
2           a.       computing each parameter for a multi-parameter affine transform  
3               which represents a transformation from a current frame of video  
4               information to a previous frame of video; and  
5           b.       computing said multi-parameter affine transform to thereby  
6               determine global motion information representative of said zoom  
7               and pan of said camera.
- 1    7.       The method of claim 6, wherein said detecting step comprises computing  
2           local object motion for said one or more moving video objects based on  
3           said global motion information and on one or more of said motion vectors  
4           which correspond to said one or more moving video objects.



- 1     8.     The method of claim 7, further comprising the steps of :
- 2           a.     determining whether said local object motion is greater than a
- 3                   predetermined threshold;
- 4           b.     applying morphological operations to said determined local object
- 5                   motion values to eliminate any erroneously sensed moving objects;
- 6                   and
- 7           c.     determining border points of said detected moving objects to
- 8                   thereby locate a bounding box for said detected moving object.
- 1     9.     An apparatus for detecting moving video objects in a compressed digital
- 2           bitstream which represents a sequence of fields or frames of video
- 3           information for one or more previously captured scenes of video,
- 4           comprising:
- 5           a.     means for analyzing said compressed bitstream to locate scene cuts
- 6                   therein and to determine at least one sequence of fields or frames of
- 7                   video information which represents a single video scene;
- 8           b.     means, coupled to said analyzing means, for estimating one or more
- 9                   operating parameters for a camera which initially viewed said video
- 10           scene by analyzing a portion of said compressed bitstream which
- 11                   corresponds to said video scene; and
- 12           c.     means, coupled to said estimating means, for detecting one or more
- 13                   moving video objects represented in said compressed bitstream by
- 14                   applying global motion compensation with said estimated operating
- 15                   parameters.
- 1     10.    The apparatus of claim 9, further comprising means, coupled to said
- 2           detecting means, for extracting visual features of said one or more detected
- 3           moving video objects from said compressed bitstream.

- 1     11.     The apparatus of claim 9, wherein said compressed bitstream comprises a  
2             bitstream compressed in accordance with the MPEG video standard, and  
3             wherein said analyzing means further comprises:
- 4             a.       parsing means for receiving and parsing said compressed bitstream  
5                   into blocks of video information and associated motion vector  
6                   information for each field or frame of video information which  
7                   comprises the determined sequence of fields or frames of video  
8                   information representative of said single scene;
- 9             b.       means, coupled to said parsing means, for performing inverse  
10               motion compensation on each of said parsed blocks of video  
11               information to derive discrete cosign transform coefficients for each  
12               of said parsed blocks of video information;
- 13            c.       counting means, coupled to said inverse motion compensation  
14               means, for counting said motion vector information associated with  
15               each of said parsed blocks of vide information; and
- 16            d.       determining means, coupled to said counting mens, for determining  
17               from said counted motion vector information and said discrete  
18               cosign transform coefficient information whether one of said scene  
19               cuts has occurred.
- 1     12.     The apparatus of claim 9, wherein said analyzing means further comprises  
2             means for parsing said compressed bitstream into blocks of video  
3             information and associated motion vector information for each field or  
4             frame of video information which comprises the determined sequence of  
5             fields or frames of video information representative of said single scene,  
6             and wherein said estimating means further comprises means for estimating  
7             any zoom and any pan of said camera by determining a multi-parameter  
8             transform model applied to said parsed motion vector information.

- 1     13.    The apparatus of claim 12, wherein said estimating means further  
2            comprises:  
3            a.       means for computing each parameter for a multi-parameter affine  
4                   transform which represents a transformation from a current frame of  
5                   video information to a previous frame of video; and  
6            b.       means, coupled to said transform parameter computing means, for  
7                   computing said multi-parameter affine transform to thereby  
8                   determine global motion information representative of said zoom  
9                   and pan of said camera.
- 1     14.    The apparatus of claim 12, wherein said detecting means further comprises  
2            means for computing local object motion for said one or more moving  
3            video objects based on said global motion information and on one or more  
4            of said motion vectors which correspond to said one or more moving video  
5            objects.
- 1     15.    The apparatus of claim 14, further comprising:  
2            a.       comparison means, coupled to said local object motion computing  
3                   means, for determining whether said local object motion is greater  
4                   than a predetermined threshold;  
5            b.       morphological operation means, coupled to said comparison  
6                   means, for determined local object motion values to eliminate any  
7                   erroneously sensed moving objects; and  
8            c.       border point determination means, coupled to said morphological  
9                   operation means, for determining border points of said detected  
10                  moving objects to thereby locate a bounding box for said detected  
11                  moving object.

- 1     16.     A method for dissolving an incoming scene of video information which  
2             comprises a sequence of fields or frame of compressed video information  
3             and an outgoing scene of video information which comprises a sequence of  
4             fields or frame of compressed video information, comprising the steps of:
- 5             a.       applying DCT domain motion inverse compensation to obtain DCT  
6                       coefficients for all blocks of video information which make up a last  
7                       frame of said outgoing video scene;
- 8             b.       applying DCT domain inverse motion compensation to obtain the  
9                       DCT coefficients for all blocks of video information which make up  
10                      the first frame of said incoming video scene; and
- 11            c.       creating a first frame in a dissolve region from said DCT  
12                       coefficients of said last outgoing frame and said first incoming  
13                       frame.
- 1     17.     The method of claim 16, further comprising the step of choosing an initial  
2             value for a weighing function prior to step (c).
- 1     18.     The method of claim 17, further comprising the steps of
- 2             d.       incrementing said weighting function value; and
- 3             e.       creating a second frame in said dissolve region from said DCT  
4                       coefficients of said last outgoing frame and said first incoming  
5                       frame using said incremented weighing function value.
- 1     19.     A method for masking a region of a compressed frame of digital video  
2             information, comprising the steps of :
- 3             a.       determining whether said frame to be masked is intra-coded,  
4                       predictive-coded or bi-directionally predictive-coded;
- 5             b.       if said frame is intra-coded:
- 6                    i.       extracting DCT coefficients for all blocks within said frame;
- 7                    ii.       examining block<sub>n</sub> to determine where in said frame said  
8                       block is located;

- 9                   iii.     setting said DCT coefficients for said block to zero if said  
10                   block is outside said mask region;  
11                   iv.     applying a DCT cropping algorithm to said DCT  
12                   coefficients if said block is on the boundary of said mask  
13                   region; and  
14                   v.     repeating steps (b)(ii) - (b)(iv) for each block in said frame;  
15       c.     If said frame is predictive-coded or bi-directionally predictive-  
16             coded:  
17             i.     examining motion vectors associated with block<sub>n</sub> to  
18             determine whether they point to blocks outside or on said  
19             mask region;  
20             ii.    reencoding said block if a motion vector points to blocks  
21             outside or on said mask region; and  
22             iii.   repeating steps (c)(i) - (c)(ii) for all blocks in said frame.
- 1     20.    A method for generating a reduced speed sequence of frames of video  
2           information from a sequence of frames of compressed video information,  
3           comprising the steps of:  
4           a.     selecting a frame of compressed video information to be repeated;  
5           b.     determining whether said frame to be repeated is intra-coded,  
6           predictive-coded or bi-directionally predictive-coded;  
7           c.     converting said frame into an intra-coded frame if said frame is a  
8           predictive-coded or bi-directionally predictive-coded frame;  
9           d.     creating duplicate predictive-coded frames; and  
10          e.     arranging said determined frame and said duplicate predictive-coded  
11          frames into a sequence of compressed frames of video information.
- 1     21.    The method of claim 20, wherein said reduced speed sequence of frames  
2           generates a frozen frame effect.

1     22.     The method of claim 20, further comprising the step of converting said  
2               frame into an intra-coded frame if said frame is a predictive-coded or bi-  
3               directionally predictive-coded frame.

1     23.     A system for editing compressed video information over a distributed  
2               network, comprising:  
3               a.        a client computer;  
4               b.        a network link, coupled to said client computer, for permitting said  
5               client computer to search for and locate compressed video  
6               information on said distributed network; and  
7               c.        means for editing a compressed bitstream of video information over  
8               said distributed network.

1     24.     The system of claim 21, wherein said editing means includes means for  
2               dissolving an incoming scene of video information which includes a  
3               sequence of fields or frame of compressed video information and an  
4               outgoing scene of video information which includes a sequence of fields or  
5               frame of compressed video information, said dissolving means comprising:  
6               a.        outgoing motion compensation means for applying DCT domain  
7               motion compensation to a last frame of said outgoing video scene to  
8               obtain DCT coefficients for all blocks of video information which  
9               make up said last frame of said outgoing video scene;  
10              b.        incoming motion compensation means, for applying DCT domain  
11              motion compensation to a first frame of said incoming video scene  
12              to obtain the DCT coefficients for all blocks of video information  
13              which make up said first frame of said incoming video scene; and  
14              c.        dissolve region creating means, coupled to said incoming motion  
15              compensation means and to said outgoing motion compensation  
16              means, for creating a first frame in a dissolve region from said DCT  
17              coefficients of said last outgoing frame and said first incoming  
18              frame.

- 1     25.     The system of claim 21, wherein said editing means includes means for  
2             masking a region of a compressed frame of digital video information, said  
3             masking means comprising:
- 4             a.        means for determining whether said frame to be masked is intra-  
5                        coded, predictive-coded or bi-directionally predictive-coded;
- 6             b.        means for processing intra-coded frames including:
- 7                        i.        means for receiving DCT coefficients and for extracting  
8                                DCT coefficients for all blocks within said frame;
- 9                        ii.        means, coupled to said receiving means, for examining  
10                               blocks of compressed video information in said frame to  
11                               determine where in said frame said block is located;
- 12                        iii.        means, coupled to said examining means, for setting said  
13                               DCT coefficients for said block to zero if said block is  
14                               outside said mask region; and
- 15                        iv.        means, coupled to said setting means, for applying a DCT  
16                               translation algorithm to said DCT coefficients if said block  
17                               is on the boundary of said mask region; and
- 18             c.        means for processing predictive-coded and bi-directionally  
19                        predictive-coded frames, including:
- 20                        i.        means for receiving and examining motion vectors  
21                               associated with blocks of video information to determine  
22                               whether they point to blocks outside or on said mask region;  
23                               and
- 24                        ii.        means, coupled to said receiving means, for reencoding said  
25                               block if a motion vector points to blocks outside or on said  
26                               mask region.

- 1     26.     The system of claim 21, wherein said editing means includes means  
2             generating a reduced speed sequence of frames of video information from a  
3             sequence of frames of compressed video information, comprising:  
4             a.     selection means for selecting a frame of compressed video  
5                     information to be repeated;  
6             b.     computational means, coupled to said selection means, for  
7                     determining whether said frame to be repeated is intra-coded,  
8                     predictive-coded or bi-directionally predictive-coded;  
9             c.     frame generating means, coupled to said computational means and  
10                    to said converting means, for creating duplicate predictive-coded  
11                    frames; and  
12             d.     frame arranging means, coupled to said frame generating means, for  
13                    arranging said determined frame and said duplicate predictive-coded  
14                    frames into a sequence of compressed frames of video information.
- 1     27.     A method for converting a full resolution compressed domain bitstream  
2             into a reduced resolution compressed bitstream, comprising the steps of:  
3             a.     examining a frame of compressed video information from said full  
4                     resolution bitstream;  
5             b.     determining whether said examined frame is intra-coded, predictive-  
6                     coded or bi-directionally predictive-coded;  
7             c.     extracting DCT DC coefficients for said determined frame if said  
8                     determined frame is intra-coded  
9             d.     applying DCT domain inverse motion compensation to said frame  
10                    to extract DCT DC coefficients if said frame is predictive-coded or  
11                    bi-directionally predictive-coded; and  
12             e.     converting said extracted DCT DC coefficients into DCT DC  
13                    coefficients for a reduced size intra-coded frame of video.



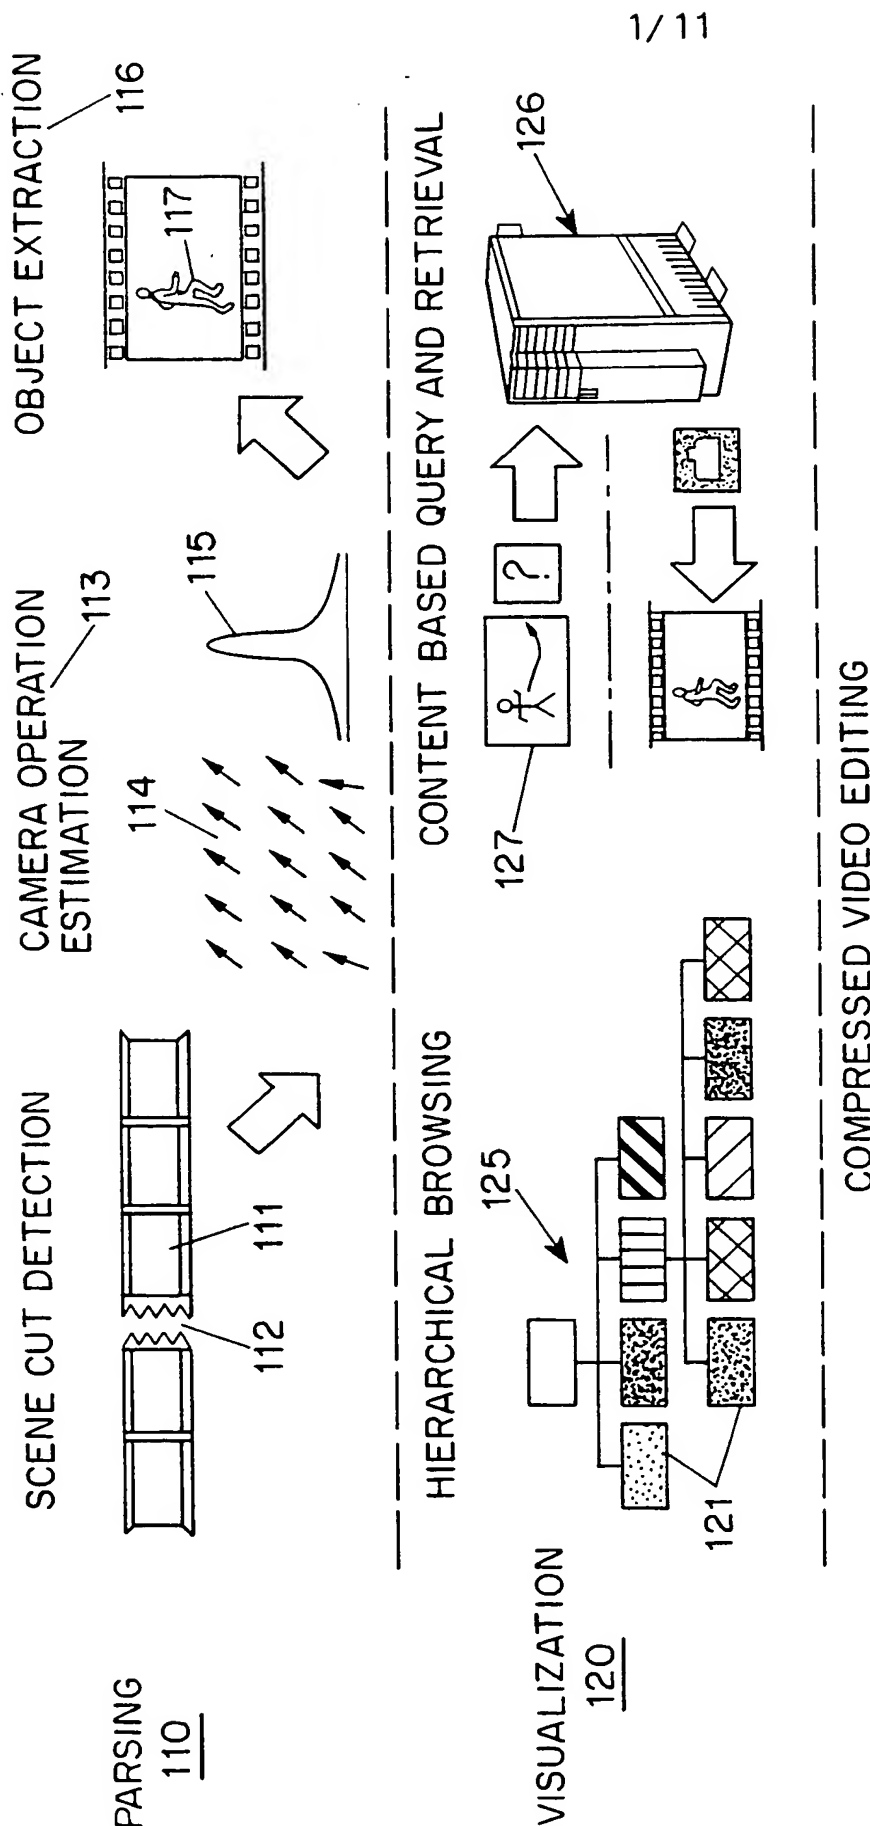


FIG. 1

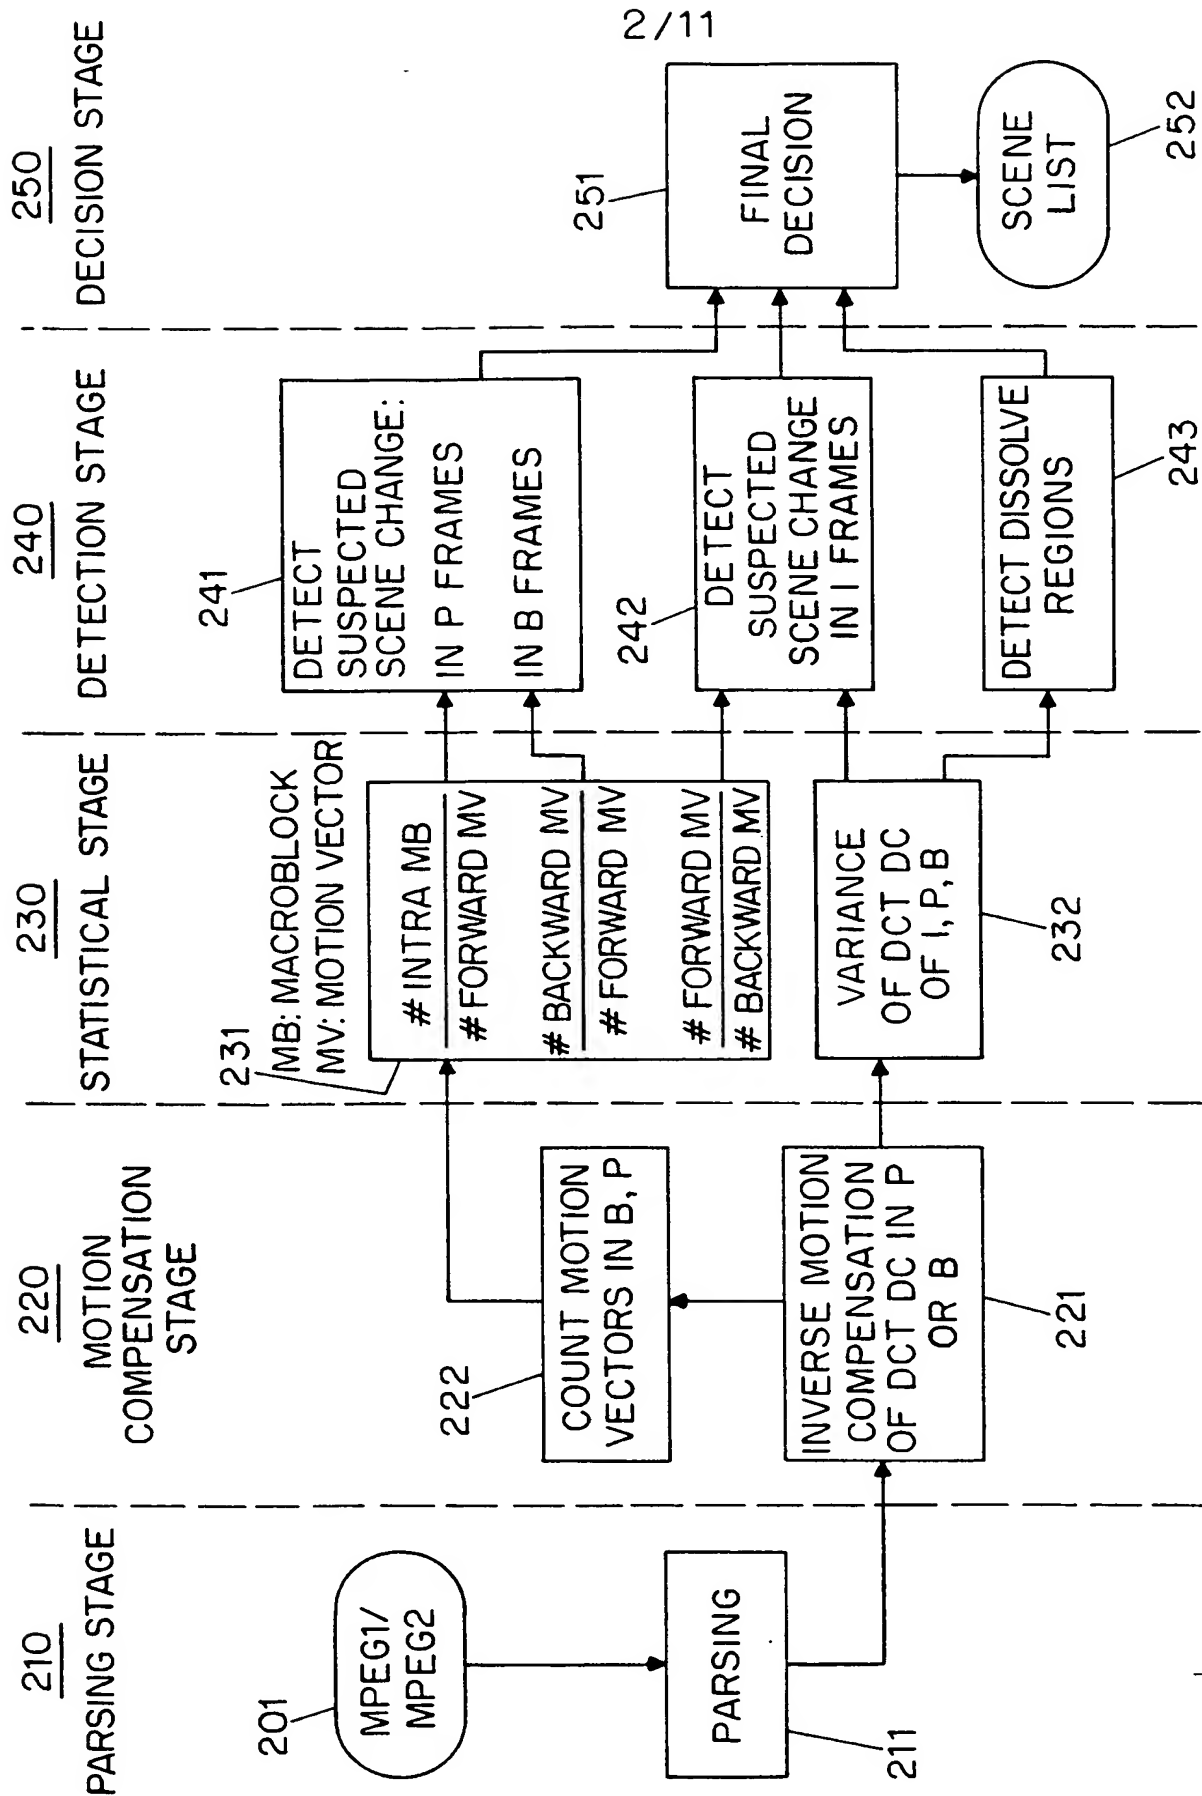


FIG. 2

3/11

300

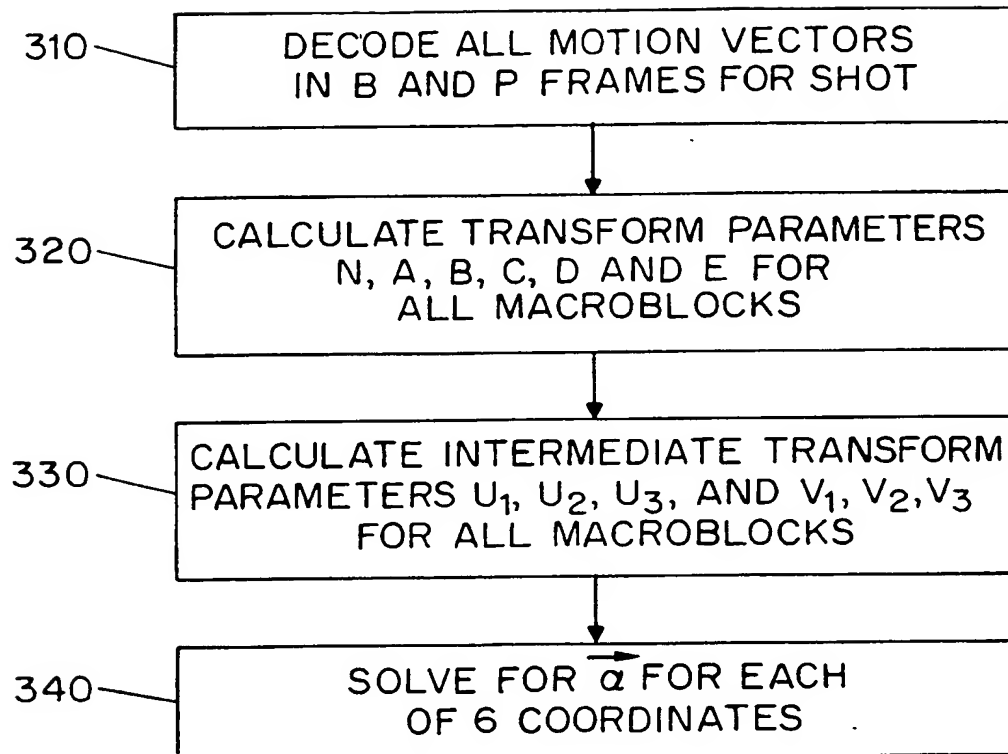


FIG. 3

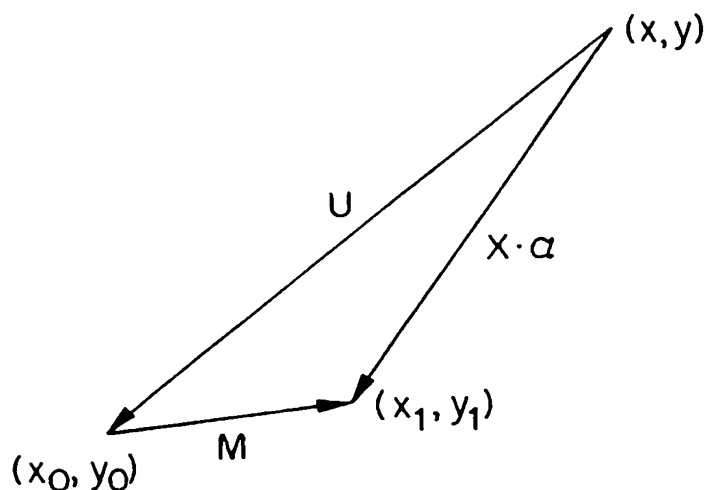


FIG. 4

4/11



FIG. 5a



FIG. 5b

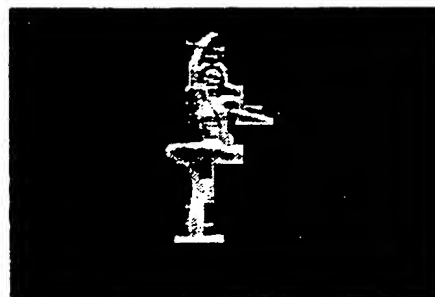


FIG. 5c



FIG. 5d

RECTIFIED SHEET (RULE 91)

5/11

600

Apply Global motion Compensation to a  
Present FRAME OF VIDEO

610



Compare each Globally Motion  
Compensated MOTION VECTOR in  
The present Frame to A Predetermined  
Threshold value

620



Count the Number of contiguous  
Blocks which have non-zero  
Globally Compensated motion vectors

630



Compare Count to predetermined  
minimum value to eliminate False  
objects

640



Extract border points of object to  
form a bounding box and save OCT  
coordinates for binned object

650

Figure 6

6/11

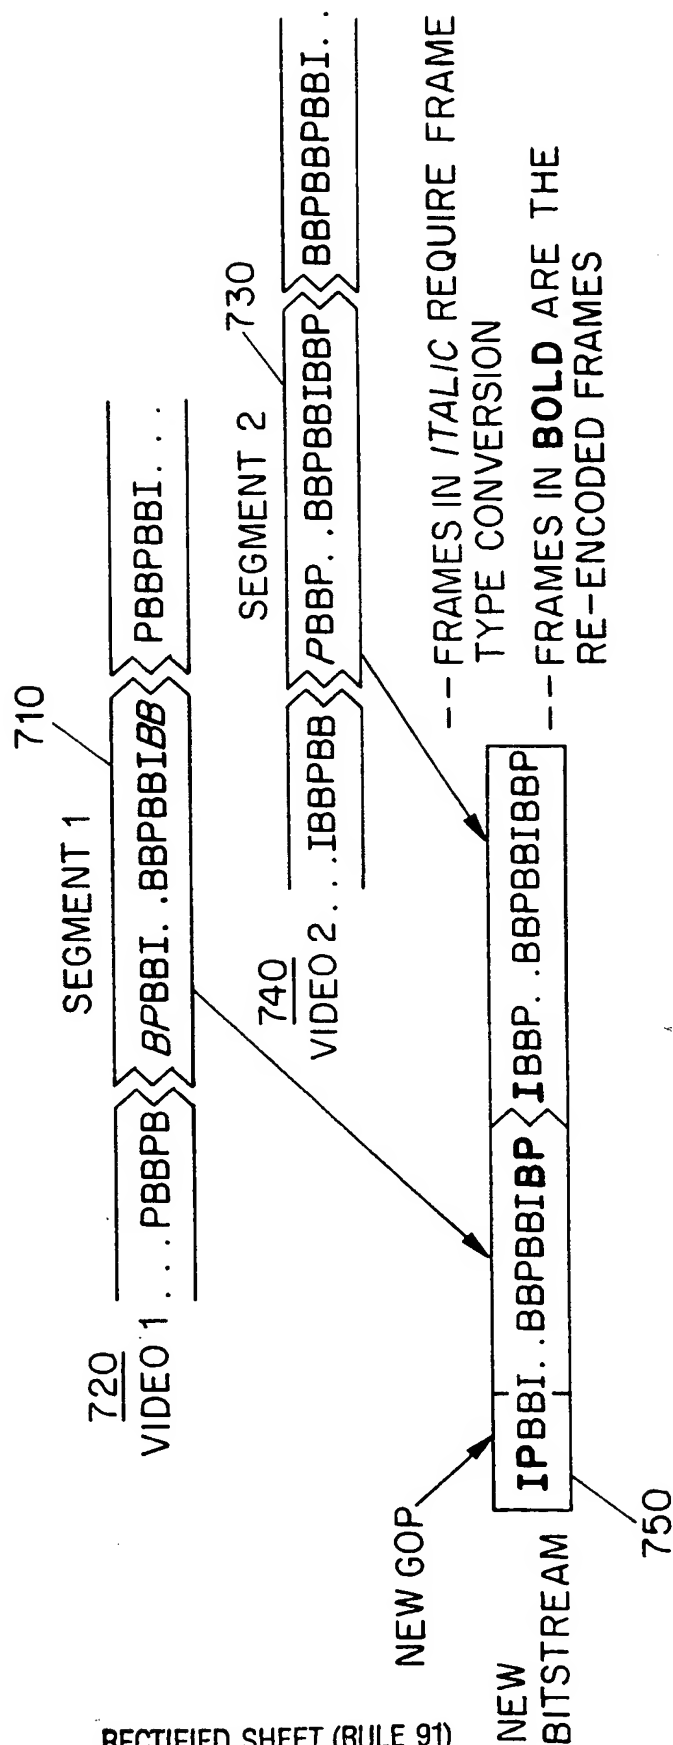


FIG. 7

7/11

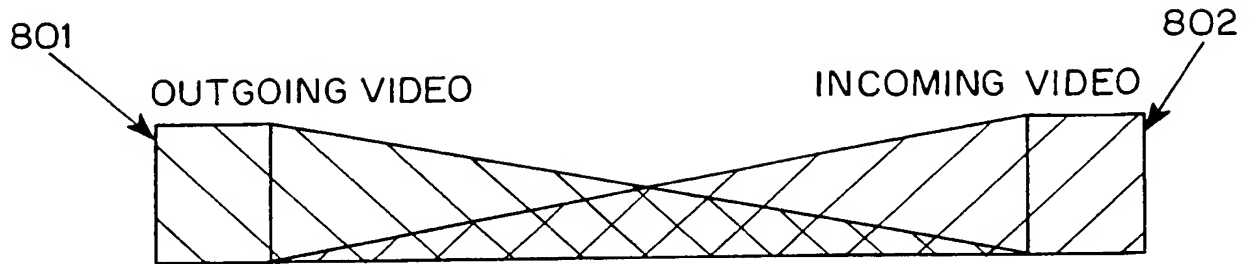


FIG. 8a

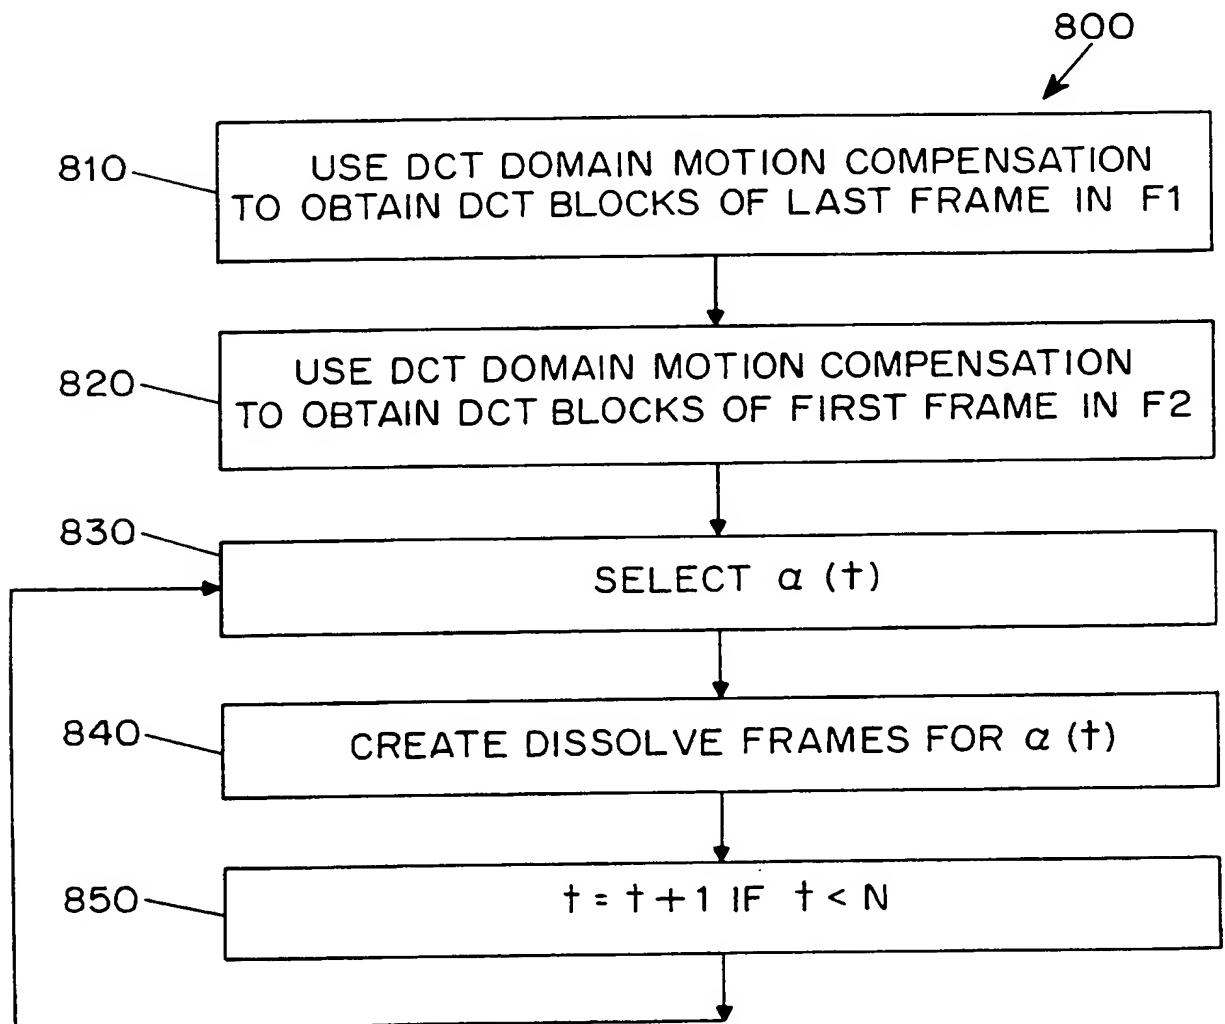


FIG. 8b

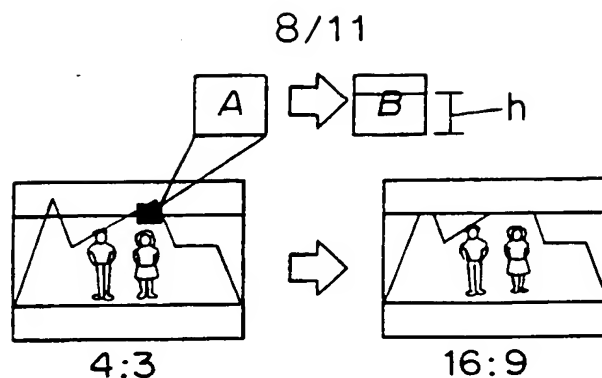


FIG. 9a

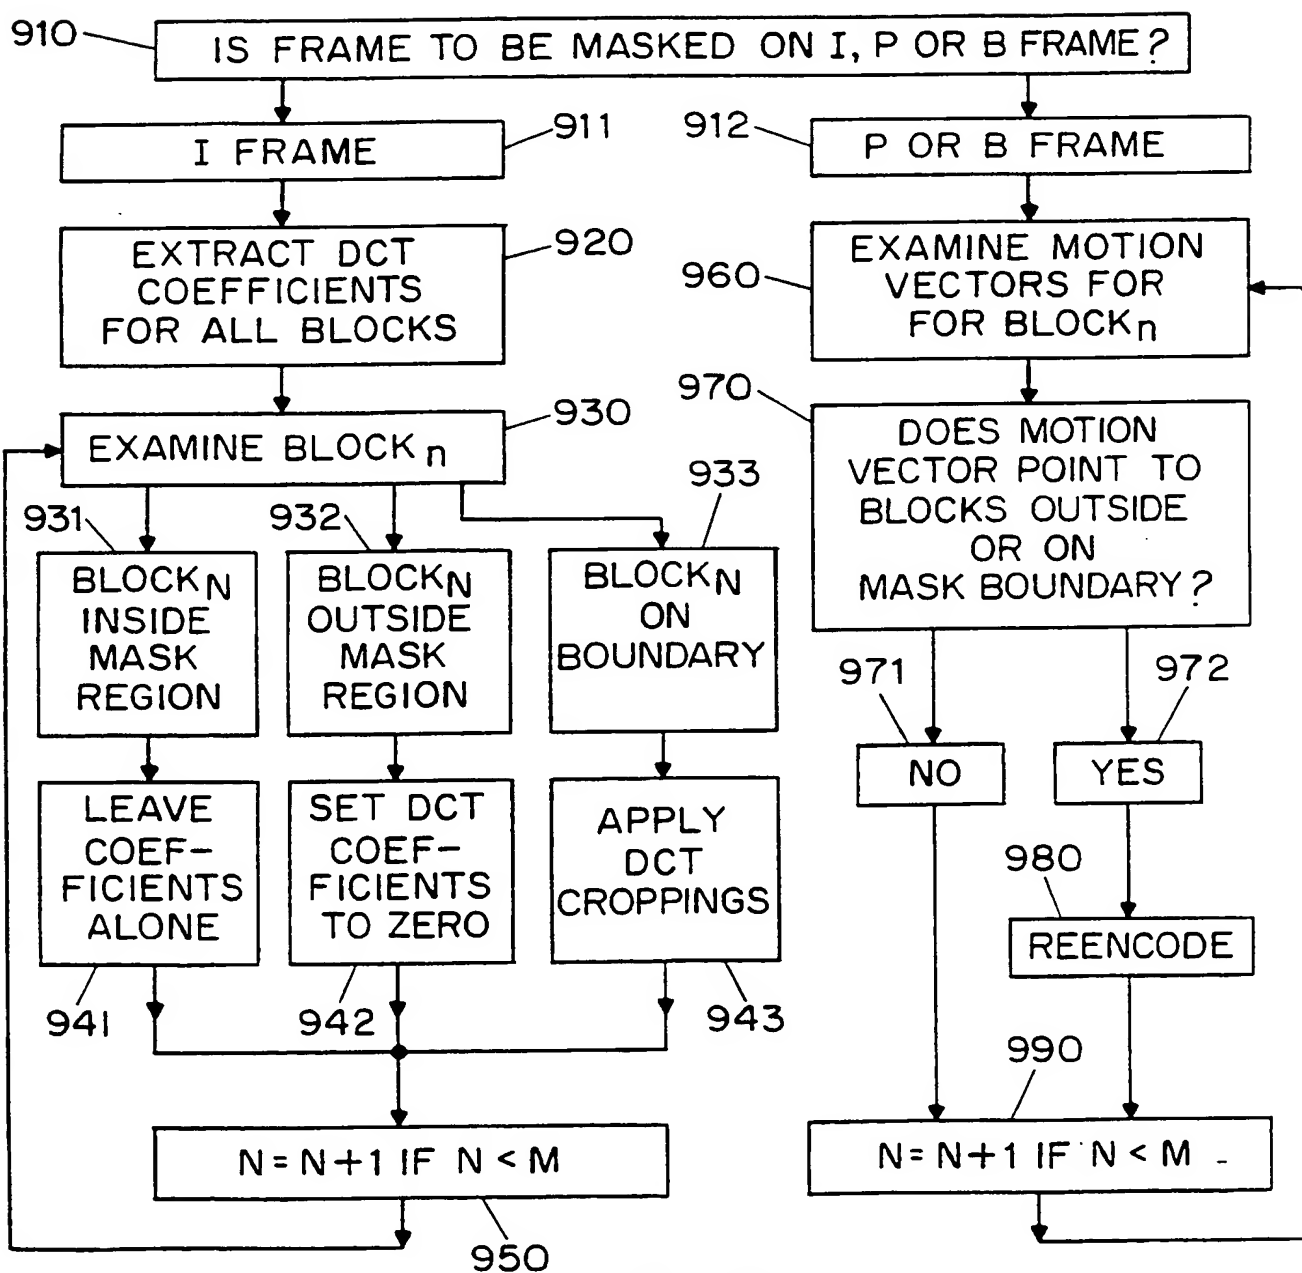


FIG. 9b



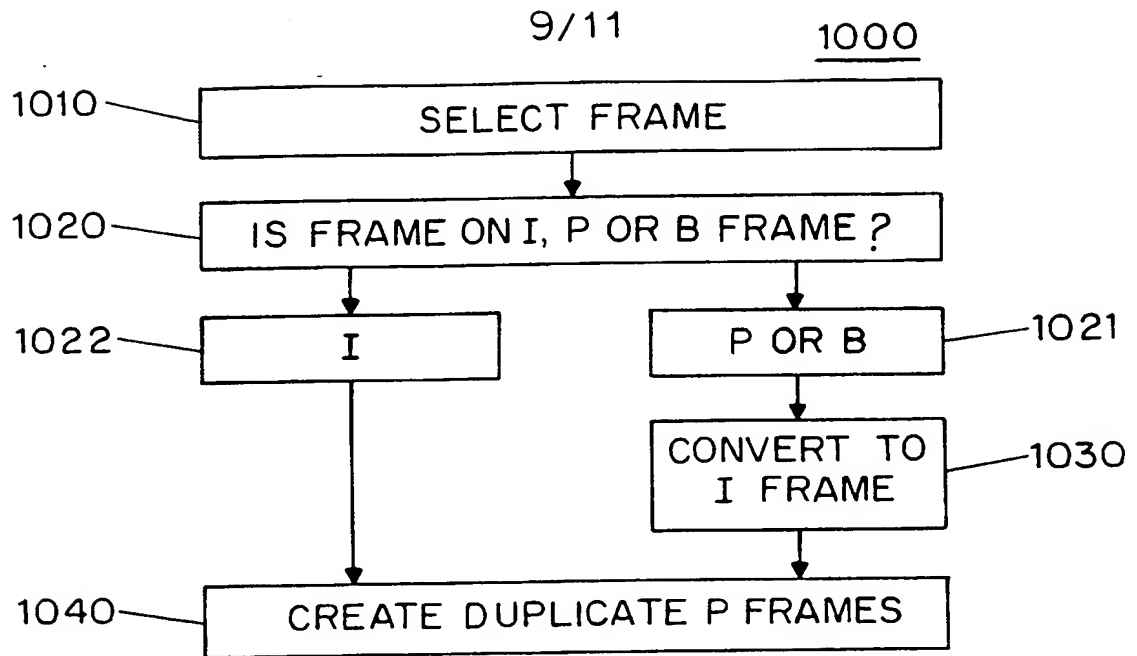


FIG. 10

	INPUT VIDEO
DISPLAY ORDER	. . B <sub>-2</sub> B <sub>-1</sub> I <sub>0</sub> B <sub>1</sub> B <sub>2</sub> P <sub>3</sub> . .
STORAGE ORDER	. . I <sub>0</sub> B <sub>-2</sub> B <sub>-1</sub> P <sub>3</sub> B <sub>1</sub> B <sub>2</sub> . .
<hr/>	
APPROACH 1	OUTPUT VIDEO, RATE = 1/2
DISPLAY ORDER	. . B <sub>-2</sub> B' <sub>-2</sub> B <sub>-1</sub> B' <sub>-1</sub> I <sub>0</sub> <b>P</b> B <sub>1</sub> B' <sub>1</sub> B <sub>2</sub> B' <sub>2</sub> P <sub>3</sub> <b>P</b> . .
STORAGE ORDER	. . I <sub>0</sub> B <sub>-2</sub> B' <sub>-2</sub> B <sub>-1</sub> B' <sub>-1</sub> <b>P</b> P <sub>3</sub> B <sub>1</sub> B' <sub>1</sub> B <sub>2</sub> B' <sub>2</sub> <b>P</b> . .
FRAMES WITH PRIME' ARE DUPLICATED FRAMES	
<b>P</b> : DUPLICATED	

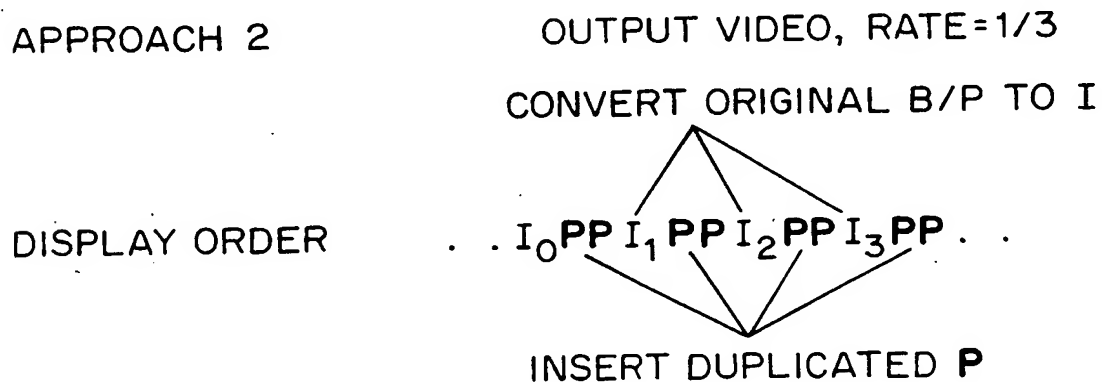


FIG. 11

10/11

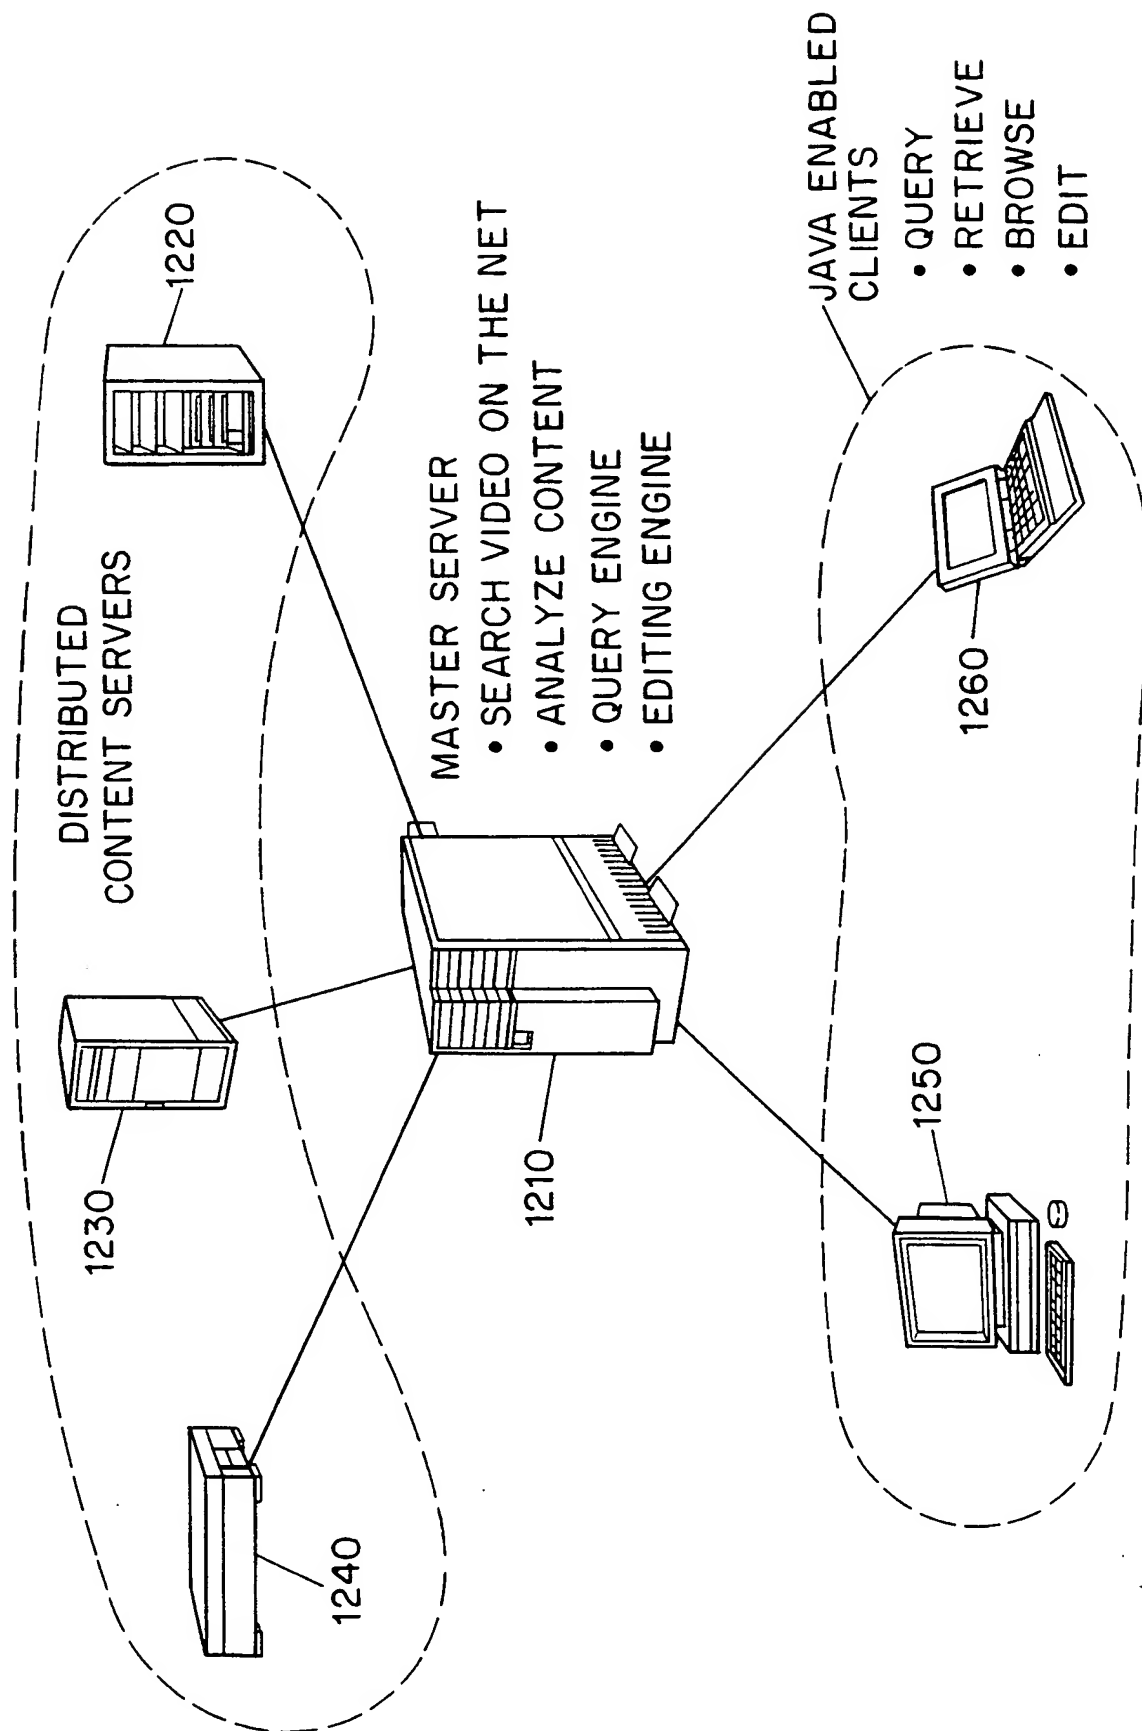


FIG. 12

RECTIFIED SHEET (RULE 91)

11/11

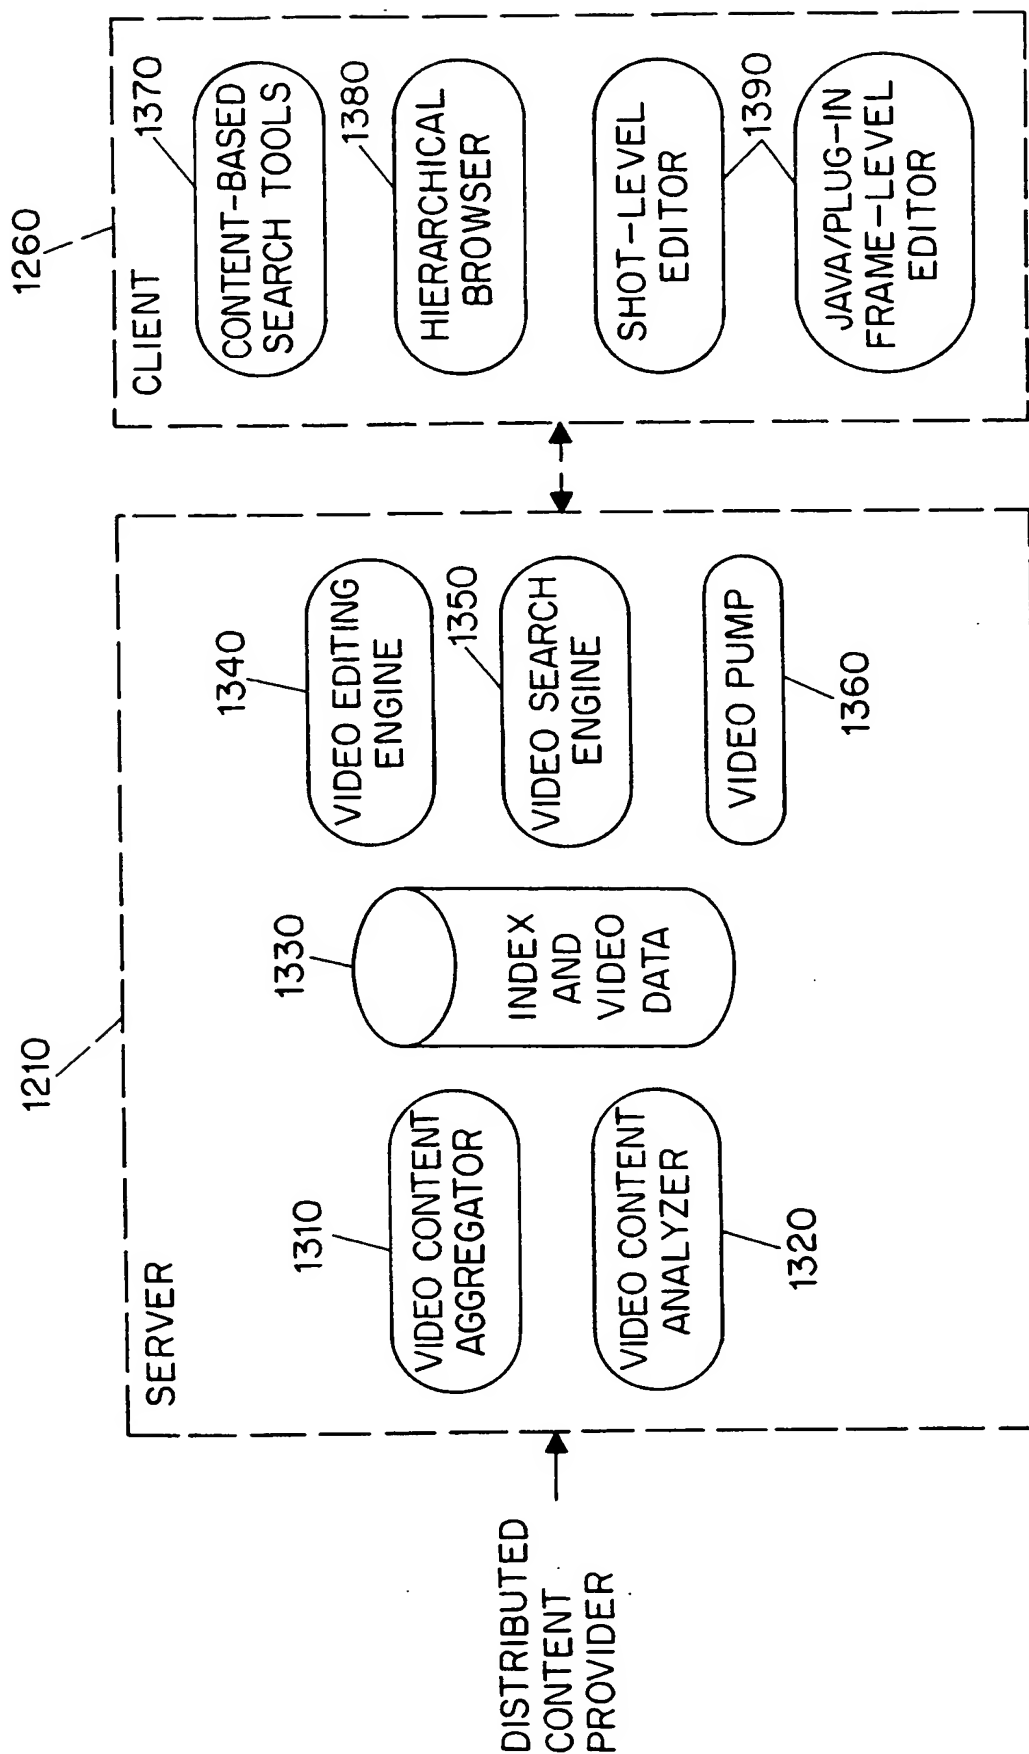


FIG. 13

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US97/08266

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) :H04N 7/12, 5/14

US CL :348/416, 415, 384, 411, 699

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 348/384, 385, 404, 405, 409, 411, 415, 416, 699, 700; 352/129

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS: scene cut, scene change, fading, freeze frame, dissolve, masking, MPEG.

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, 5,461,679 A (NORMILE et al) 24 October 1995, column 13, lines 24-67; column 14, lines 28-67; column 16, lines 20-45.	1-27
Y	US, 5,606,655 A (ARMAN et al) 25 February 1997, column 6, lines 24-68; column 7, lines 20-68; column 8, lines 8-68; column 9, lines 29-68.	1-15
Y	US, 5,353,391 A (COHEN et al) 04 October 1994, column 16, lines 30-68; column 29, lines 10-60.	16-27
A	US, 5,408,274 A (CHANG et al) 18 April 1995.	1-27
A	US, 5,262,856 A (LIPPMAN et al) 16 November 1993	16-27

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 21 AUGUST 1997	Date of mailing of the international search report 28 OCT 1997
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer TOMMY P. CHIN Telephone No. (703) 305-4700

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US97/08266

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, 5,204,706 A (SAITO) 20 April 1993.	1-15
A	US, 5,191,645 A (CARLUCCI et al) 02 March 1993.	1-15

Form PCT/ISA/210 (continuation of second sheet)(July 1992)\*

**THIS PAGE BLANK (USE 10)**